



WAAS CH 77638 W31A	APP CRS 313°	Rwy Ldg 2821 TDZE 836 Apt Elev 836
--	------------------------	---

RNAV (GPS) RWY 31

SMITH FLD (SMD)

NA -21°C Rwy 31 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Procedure NA at night. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet, LP Cat C visibility ¼ SM and LNAV Cat C visibility ½ SM.	MISSED APPROACH: Climb to 2700 direct GRUSS and on track 273° to WERBU and hold.
--	--

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

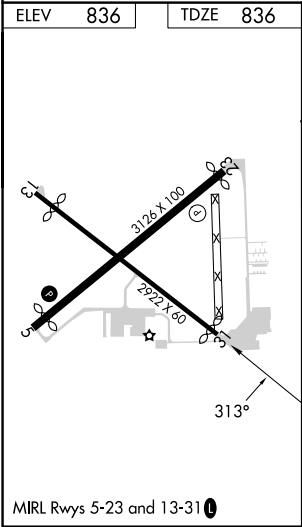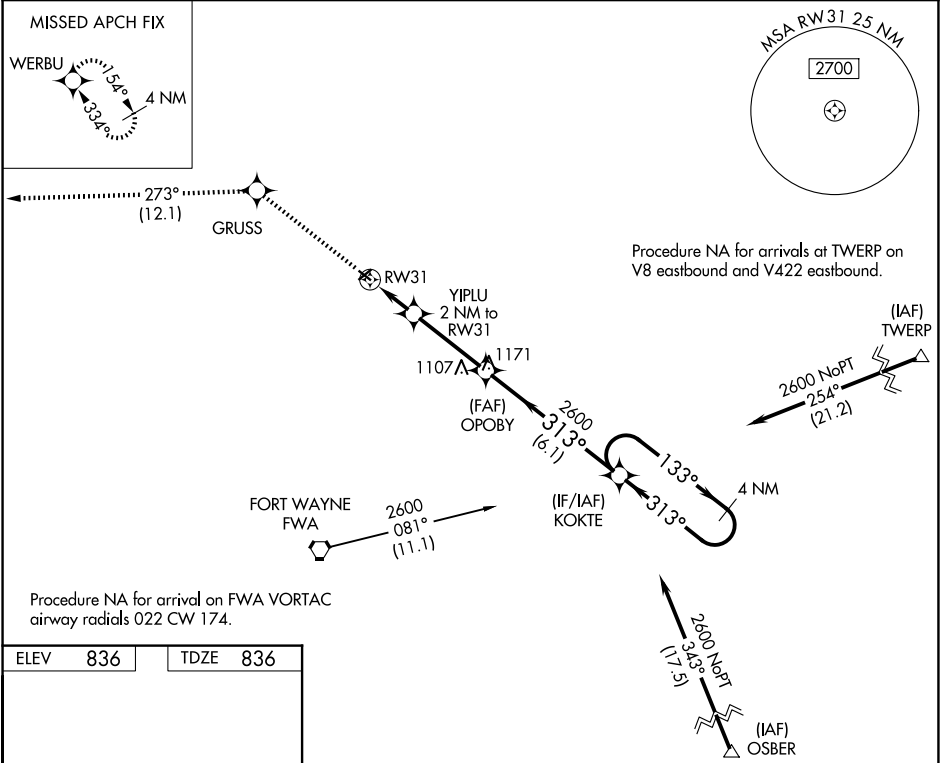

2700	GRUSS	tr 273°	WERBU	Visual Segment - Obstacles.		4 NM
				OPOBY	KOKTE	Holding Pattern
			YIPLU 2 NM to RW31	313°	133°	2600
				2600	313°	
			RW31	1500		
			2 NM	3.3 NM	6.1 NM	
CATEGORY	A	B	C	D		
LP MDA	1240-1	404 (500-1)	1240-1 1/8 404 (500-1 1/8)	NA		
LNAV MDA	1260-1	424 (500-1)	1260-1 1/4 424 (500-1 1/4)	NA		
CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA		