


HI-TACAN Y RWY 18

TACAN NFW Chan 24	APCH CRS 172°	Rwy Idg 11,999 TDZE 636 Arpt Elev 650	[USN]	FORT WORTH NAS JRB (CARSWELL FLD) (KNFW)
FUZ VORTAC or RADAR required.			MISSED APPROACH: Climb to 3000 direct LYLEE to intercept FUZ VORTAC R-218 to MOLKE and hold.	
 * Circling not authorized E of Rwy 18-36.				

ATIS★ 351.675	LONE STAR APP CON 125.8 257.95	NAVY FORT WORTH TOWER★ 120.950 269.325	GND CON 121.675 279.575	CLNC DEL 126.4 254.325	ASR/ PAR
------------------	-----------------------------------	---	----------------------------	---------------------------	-------------

When local altimeter is not received use Fort Worth Meacham altimeter setting.

CAUTION: Intermediate length 5.4 NM less than minimum 6 NM for CAT C-E.

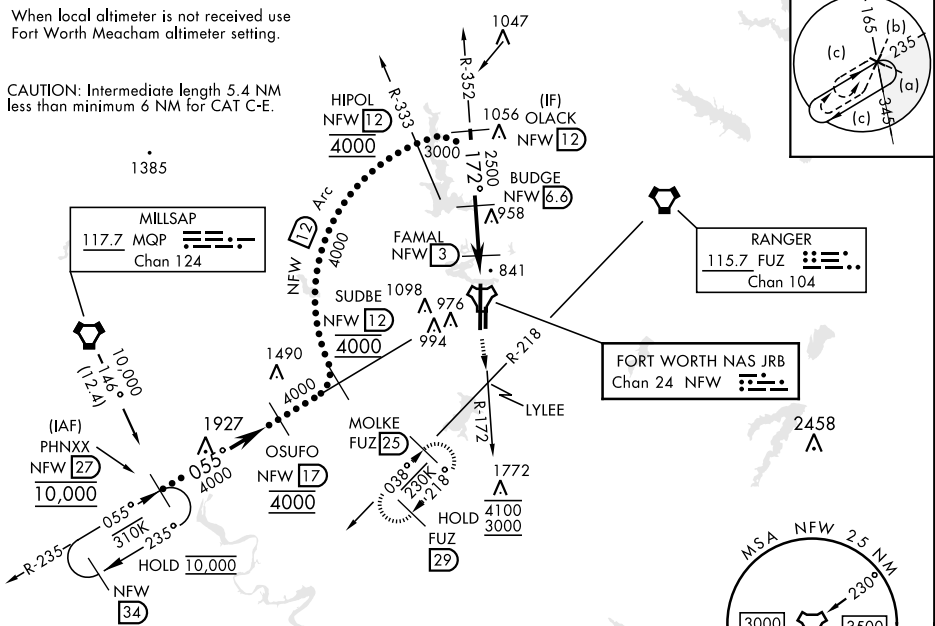

EMERG SAFE ALT 100 NM 4000

†VDP NA when using FTW altimeter setting

OLACK NFW (12)

BUDGE NFW (6.6)

FAMAL NFW (3)

HIKDI NFW (1.4)

3000

2500

1360

172°

2.98° TCH 62

3.6 NM

1.6 NM

CATEGORY	C	D	E
S-18	1100-1½	464 (500-1¾)	
C CIRCLING *	1320-1¼ 670 (700-1¾)	1340-2¼ 690 (700-2¼)	1440-2¾ 790 (800-2¾)

FORT WORTH MEACHAM ALTIMETER

CATEGORY	C	D	E
S-18	1120-1¾	484 (500-1¾)	
C CIRCLING *	1340-2 690 (700-1)	1360-2¼ 710 (700-2¼)	1460-2¾ 810 (900-2¾)

ELEV 650 TDZE 636

172°

REIL Rwy 18
HIRL Rwy 18-36

8L

(P)

(H)

1,999 x 200

(H)

177

3996 x 60

357

ASSAULT STRIP

(P)

36

☆

■ TWR

A1