

WAAS CH 69631 W36A	APP CRS 002°	Rwy Idg TDZE 142 Apt Elev 162	6501
--	------------------------	---	-------------

RNAV (GPS) RWY 36

GREENWOOD-LEFLORE (GWO)

RNP APCH-GPS.


▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. VDP and Baro-VNAV NA when using Greenville altimeter setting. Circling Rwy 5, 23 NA at night. When local altimeter setting not received, use Greenville altimeter setting: increase LPV DA to 501 feet and visibility ½ SM, LNAV/VNAV DA to 667 feet and visibility ¾ SM; increase all MDAs 120 feet and visibility LNAV Cat C/D ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 2100 direct ZUBUK and hold.

ASOS 119.975	MEMPHIS CENTER 132.5 259.1	GREENWOOD TOWER ★ 118.35 (CTAF) 0 367.6	GND CON 125.55 373.4	CLNC DEL 125.55	UNICOM 122.95
------------------------	--------------------------------------	---	--------------------------------	---------------------------	-------------------------

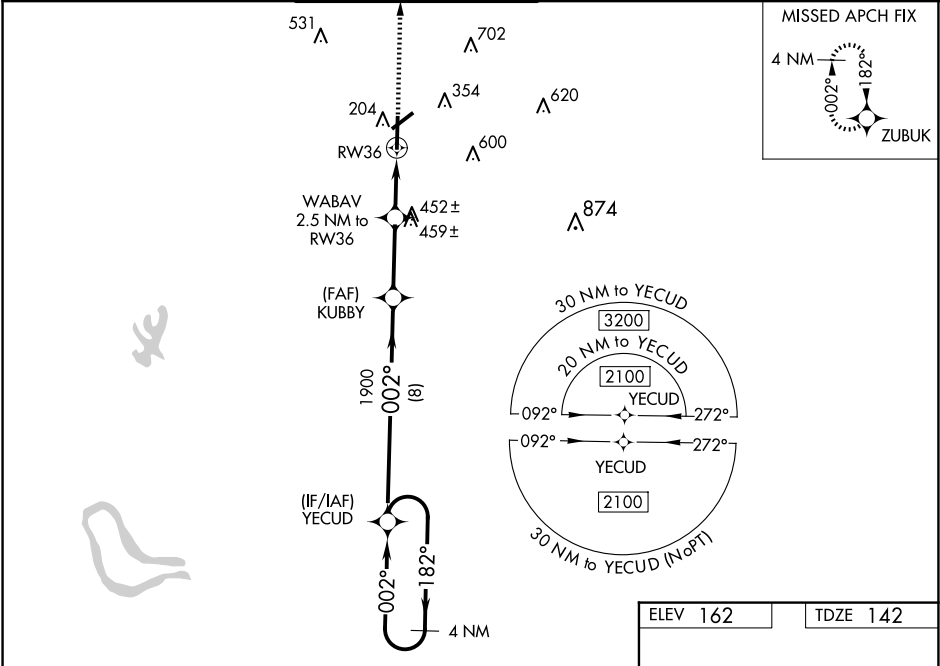

4 NM Holding Pattern		YECUD	KUBBY	WABAV	RW36
2100 ← 182°		002° →	1900	2.5 NM to RW36	
GP 3.00°				1.6 NM to RW36	
TCH 50					
		8 NM	2.9 NM	0.9	1.6 NM
CATEGORY	A	B	C	D	
LPV DA	392-¾		250 (300-¾)		
LNAV/VNAV DA	558-1⅜		416 (400-1⅜)		
LNAV MDA	700-1	558 (600-1)	700-1⅝	558 (600-1⅝)	
CIRCLING	760-1	598 (600-1)	1000-2½ 838 (900-2½)	1120-3 958 (1000-3)	

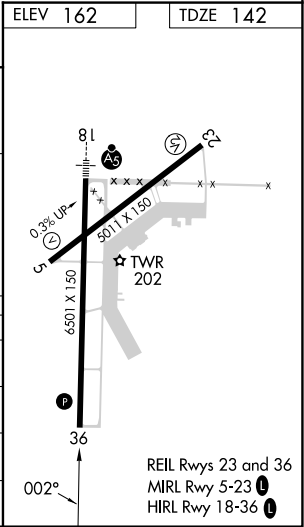

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025