

WAAS CH 82539 W27A	APP CRS 272°	Rwy Idg TDZE 629 Apt Elev 631	5001
--	------------------------	---	-------------

AL-183 (FAA)


RNAV (GPS) RWY 27
GREENWOOD COUNTY (GRD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Laurens altimeter setting.
DME/DME RNP-0.3 NA. Circling Rwy 5, 23 NA at night. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Laurens altimeter setting: increase LPV DA to 932 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 936 feet and all visibilities ½ SM; increase all MDA 60 feet and LNAV visibility Cats C and D ½ SM and Circling visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV all Cats visibility to 1 SM. For inop ALS when using Laurens altimeter setting, increase LPV and LNAV/VNAV all Cats and LNAV Cats A and B visibility to 1 SM and LNAV Cats C and D visibility to 1½ SM.

ODALS

MISSED APPROACH:
Climb to 2500 direct
MACER and hold.

ASOS 121.125	GREER APP CON ★ 120.6 350.2	UNICOM 122.975 (CTAF) 0
------------------------	---------------------------------------	-----------------------------------

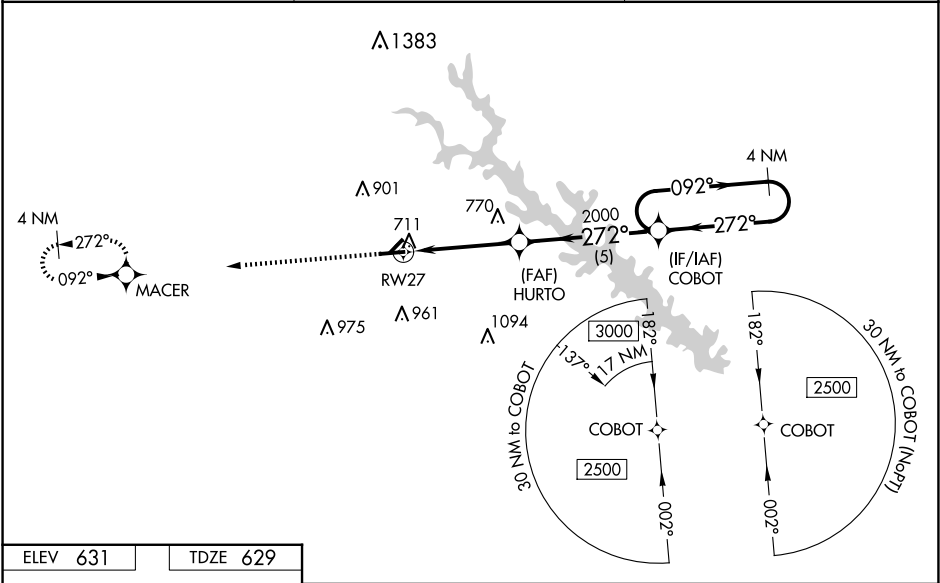

ELEV **631** TDZE **629**

MIRL Rwy 9-27 0
REIL Rwy 9 and 27 0

2500 MACER

*LNAV only.

HURTO

COBOT 4 NM Holding Pattern

GP 3.00° TCH 53

CATEGORY	A	B	C	D
LPV DA	879-¾	250 (300-¾)		
LNAV/VNAV DA	883-¾	254 (300-¾)		
LNAV MDA	980-¾ 351 (400-¾)	980-⅞ 351 (400-⅞)		
CIRCLING	1080-1 449 (500-1)	1100-1 469 (500-1)	1320-2 689 (700-2)	1340-2¼ 709 (800-2¼)

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025