

WAAS CH 69629 W32A	APP CRS 317°	Rwy Idg TDZE Apt Elev	6236 2605 2613
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

PECOS MUNI (P/E/Q)



RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting: increase LPV DA to 2900 feet, LNAV/VNAV DA to 2950 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility Cat C and LNAV Cat D ¼ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH:
Climb to 4600 direct WALOM and hold.

AWOS-3 118.175	ALBUQUERQUE CENTER 135.875 292.15	UNICOM 122.8 (CTAF) ①
--------------------------	---	---------------------------------

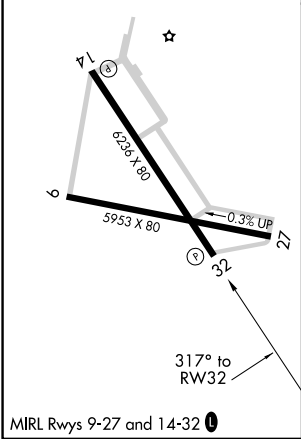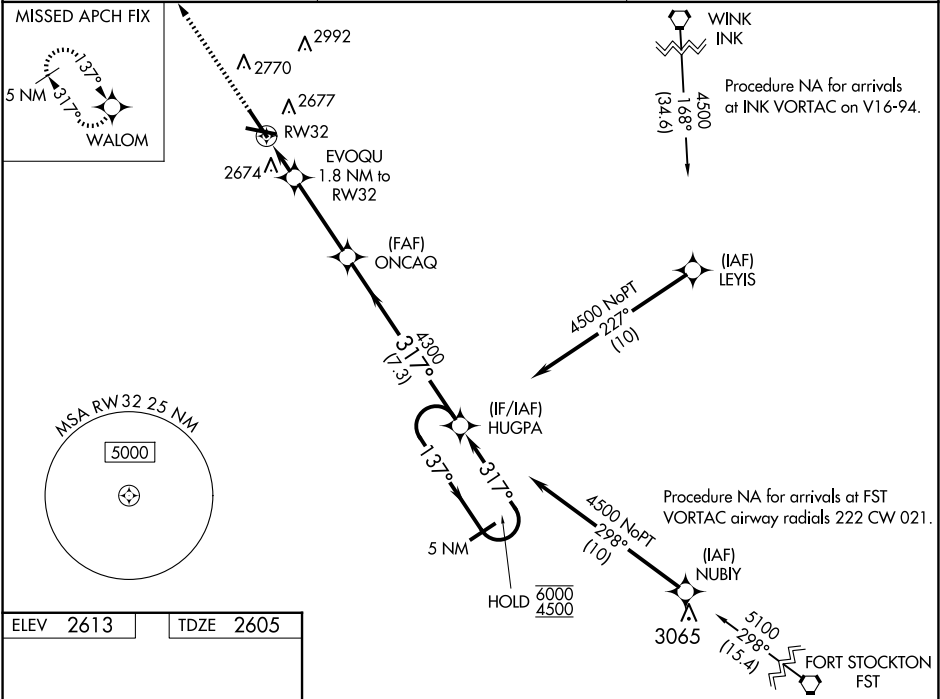

4600 WALOM		ONCAQ		HUGPA		5 NM Holding Pattern	
↑		EVOQU 1.8 NM to RW32		4300		137° → 6000 ← 317° 4500	
0.9 NM to RW32		3200		4300		GP 3.00° TCH 40	
0.9		0.9 NM		3.4 NM		7.3 NM	
CATEGORY		A		B		C	D
LPV DA		2805-¾		200 (200-¾)			
LNAV/VNAV DA		2855-¾		250 (300-¾)			
LNAV MDA		2940-1		335 (400-1)			
Ⓢ CIRCLING		3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)		

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025