


APP CRS	Rwy Ldg	9000
271°	TDZE	3852
	Apt Elev	3877

RNAV (RNP) Y RWY 27

HELENA RGNL (HLN)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 12000 on the RNAV missed approach route to PIXXI and hold, continue climb-in-hold to 12000. *Missed approach requires minimum climb of 260 feet per NM to 7900; if unable to meet climb gradient, see RNAV (RNP) Z RWY 27.
▼ -16°C For uncompensated Baro-VNAV systems, procedure NA below -28°C or above 54°C. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 DA* visibility all Cats to 1½ SM.	AGS	

ATIS 120.4	HELENA APP CON * 119.5 229.4	HELENA TOWER * 118.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
---------------	---------------------------------	--------------------------------------	------------------	------------------

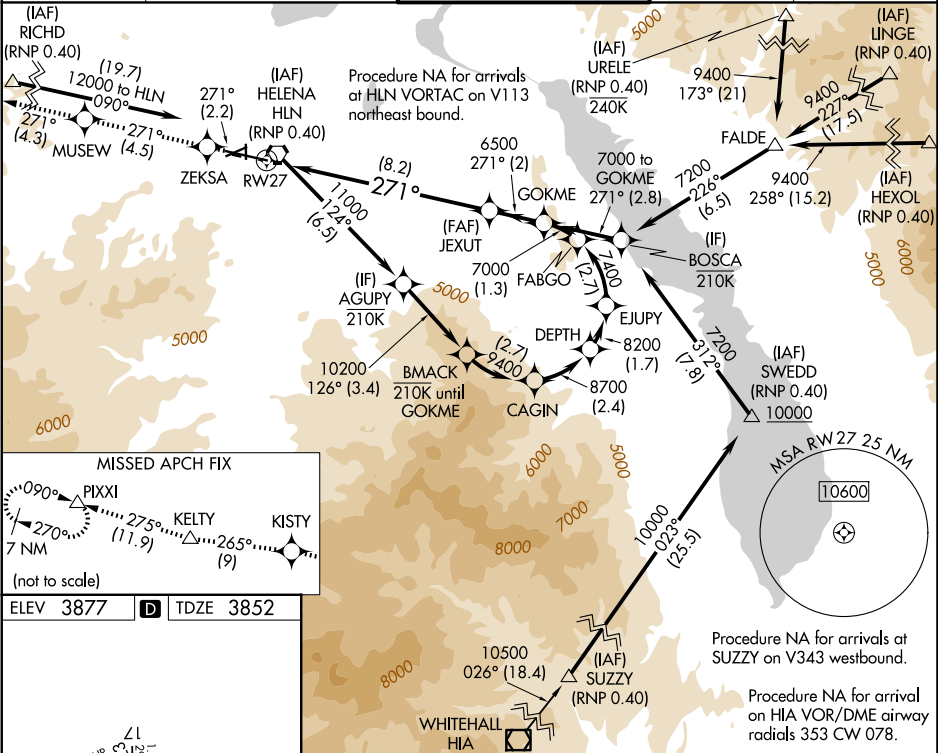

ELEV 3877	TDZE 3852				
See planview for multiple IF locations.		JEXUT			
RW27		6500			
8.2 NM		2 NM			
CATEGORY		A B C D			
RNP 0.15 DA*		4284-3/4 432 (500-3/4)			
RNP 0.30 DA*		4321-1 469 (500-1)			
REIL Rwy 9, 17, and 35					
MIRL Rwy 5-23 and 17-35					
HIRL Rwy 9-27					