

WAAS CH 61111 W22A	APP CRS 219°	Rwy Ldg 8001 TDZE 31 Apt Elev 33
--	------------------------	---

RNAV (GPS) RWY 22

ELLINGTON (EFD)


RNP APCH.

Circling NA west of Rwy 17R - 35L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D/E visibility to RVR 5500.


MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 3100 direct WATFO and hold.

ATIS 135.575 269.9	HOUSTON APP CON 134.45 284.0	ELLINGTON TOWER 126.05 253.5	GND CON 121.6 275.8
------------------------------	--	--	-------------------------------

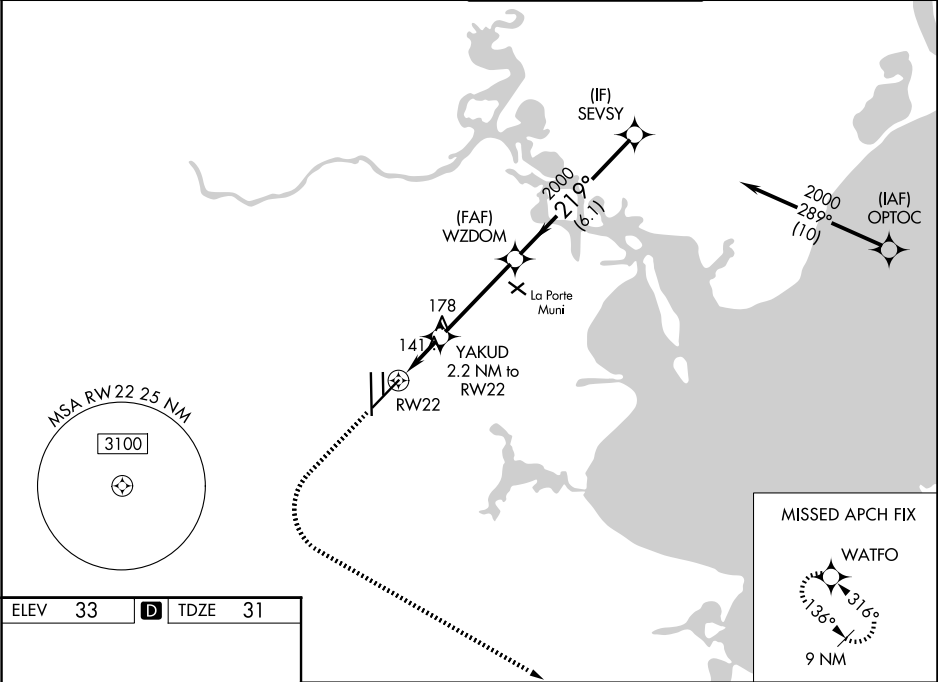

ELEV 33	D	TDZE 31
---------	----------	---------

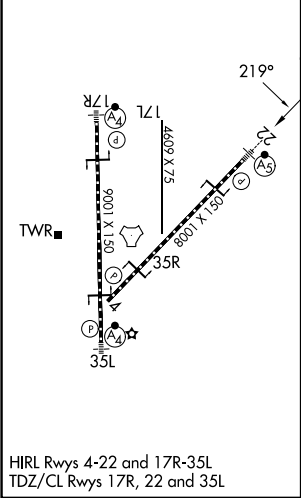

HIRL Rwy 4-22 and 17R-35L
TDZ/CL Rwy 17R, 22 and 35L

500	3100	WATFO	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 50).		
*LNAV only.			YAKUD 2.2 NM to RW22	WZDOM 2000	SEVSY
			2000		
1 NM			1.2 NM	3.8 NM	6.1 NM
CATEGORY	A	B	C	D	E
LPV	DA	231/18		200 (200-½)	
LNAV/ VNAV	DA	341/24		310 (400-½)	
LNAV	MDA	400/24	369 (400-½)	400/35 369 (400-¾)	
CIRCLING	500-1		467 (500-1)	580-1½	640-2
				547 (600-1½)	607 (700-2)
				700-2¼	667 (700-2¼)