

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>86209</b><br><b>W04A</b> | APP CRS<br><b>041°</b> | Rwy Idg <b>7602</b><br>TDZE <b>44</b><br>Apt Elev <b>46</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 4

WILLIAM P HOBBY (HOU)

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). For inop ALSF-2, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1¼ miles and LNAV Cat C/D/E visibility to 1¾ mile. DME/DME RNP-0.3 NA.

ALSF-2

ⓘ

MISSED APPROACH:  
Climb to 2000 direct  
RAYCI and hold.

|                        |                                                                          |                                   |                         |                           |       |
|------------------------|--------------------------------------------------------------------------|-----------------------------------|-------------------------|---------------------------|-------|
| D-ATIS<br><b>124.6</b> | HOUSTON APP CON<br><b>120.05 379.1 EAST</b><br><b>124.35 316.15 WEST</b> | HOBBY TOWER<br><b>118.7 256.9</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>125.45</b> | CPDLC |
|------------------------|--------------------------------------------------------------------------|-----------------------------------|-------------------------|---------------------------|-------|

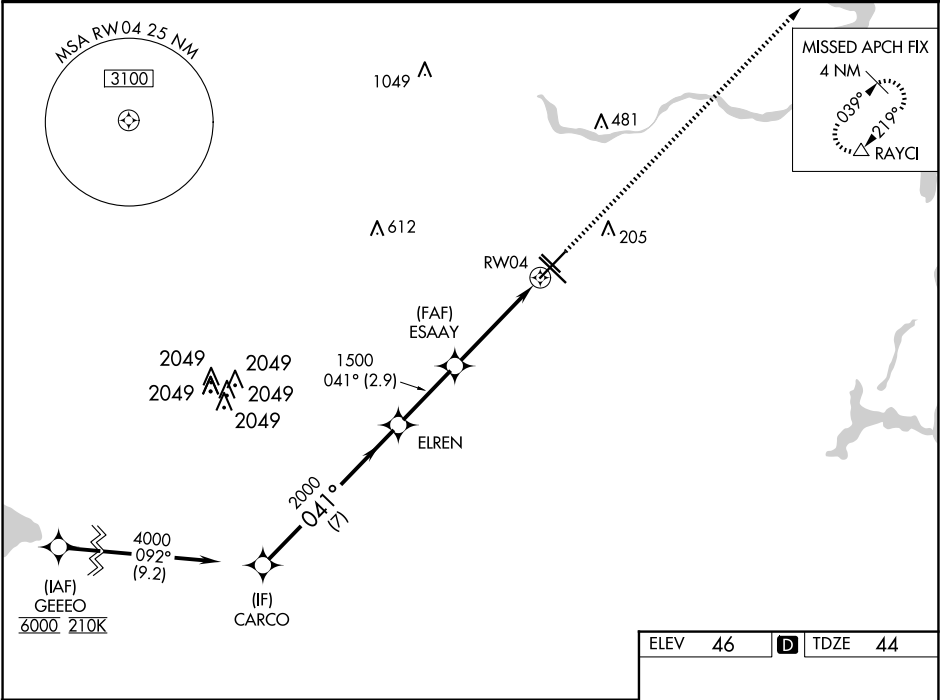

|              |                    |  |             |  |             |  |              |       |
|--------------|--------------------|--|-------------|--|-------------|--|--------------|-------|
|              | CARCO              |  | ELREN       |  | ESAAY       |  | 2000         | RAYCI |
|              | 4000               |  | 2000        |  | 1500        |  | 1049         |       |
|              | GP 3.00°<br>TCH 57 |  | 041°        |  | 041°        |  | 041°         |       |
|              | 7 NM               |  | 2.9 NM      |  | 3.1 NM      |  | 1.3 NM       |       |
| CATEGORY     | A                  |  | B           |  | C           |  | D            |       |
| LPV DA       |                    |  | 244/18      |  | 200 (200-½) |  |              |       |
| LNAV/VNAV DA |                    |  | 440/45      |  | 396 (400-¾) |  |              |       |
| LNAV MDA     | 520/24             |  | 476 (500-½) |  | 520/50      |  | 476 (500-1)  |       |
| CIRCLING     | 520-1              |  | 474 (500-1) |  | 740-2¼      |  | 694 (500-2¼) |       |
|              |                    |  |             |  |             |  | 860-3        |       |
|              |                    |  |             |  |             |  | 814 (900-3)  |       |

