

WAAS CH 63031 W14A	APP CRS 141°	Rwy Ldg 4008 TDZE 41 Apt Elev 41
--	------------------------	---

RNAV (GPS) RWY 14



JACKSONVILLE EXEC AT CRAIG (CRG)

Procedure NA at night. Baro-VNAV NA when using Jacksonville Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F).

DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Jacksonville Intl altimeter setting; increase LPV DA to 325 feet; increase LNAV/VNAV DA to 450 feet and all visibilities ½ SM; increase all MDAs 40 feet and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 1900 direct JEVAG and hold.

ATIS 125.4	JACKSONVILLE APP CON 124.9 308.4	CRAIG TOWER ★ 132.1 (CTAF) 269.525	GND CON 121.8	CLNC DEL 118.35	UNICOM 122.95
----------------------	--	--	-------------------------	---------------------------	-------------------------

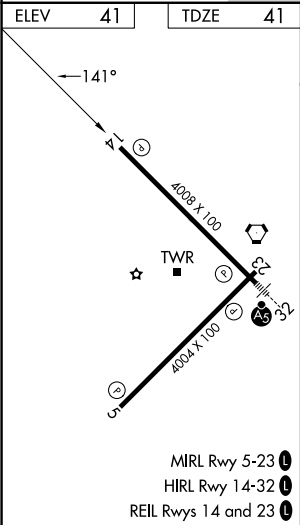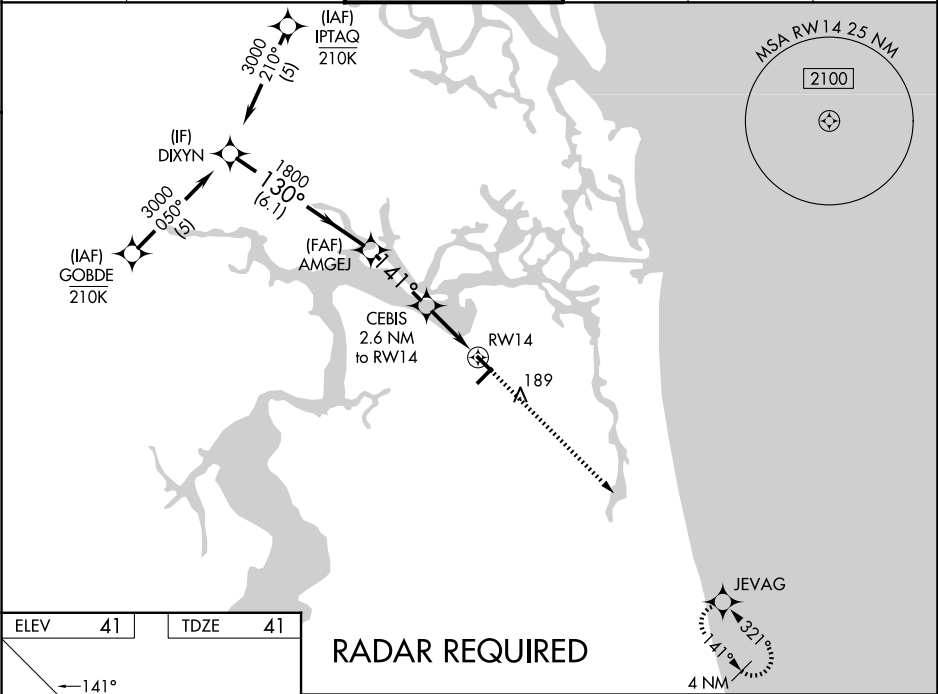

DIXYN		AMGEJ		CEBIS		RW14	
3000		1800		900		1900	
130°		141°		*900		JEVAG	
GP 3.00°		TCH 44		2.6 NM to RW14		*LNAV only.	
6.1 NM		2.8 NM		2.6 NM			
CATEGORY		A		B		C	
LPV DA		293-1		252 (300-1)			
LNAV/VNAV DA		418-1¼		377 (400-1¼)			
LNAV MDA		500-1		459 (500-1)		500-1⅓ 459 (500-1⅓)	
CIRCLING		500-1 459 (500-1)		600-1 559 (600-1)		620-1½ 579 (600-1½)	
						800-2½ 759 (800-2½)	