

LOC BC RWY 36L
LAREDO INTL (LRD)

- | | | | | |
|-----------------|-------------------------------|-------------------------------------|------------------|------------------|
| ATIS
125.775 | HOUSTON CENTER
127.8 307.2 | LAREDO TOWER ★
120.1(CTAF) 257.9 | GND CON
121.8 | UNICOM
122.95 |
|-----------------|-------------------------------|-------------------------------------|------------------|------------------|

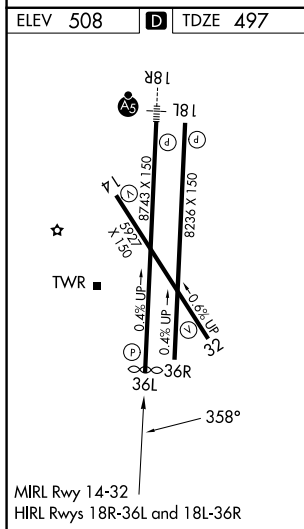
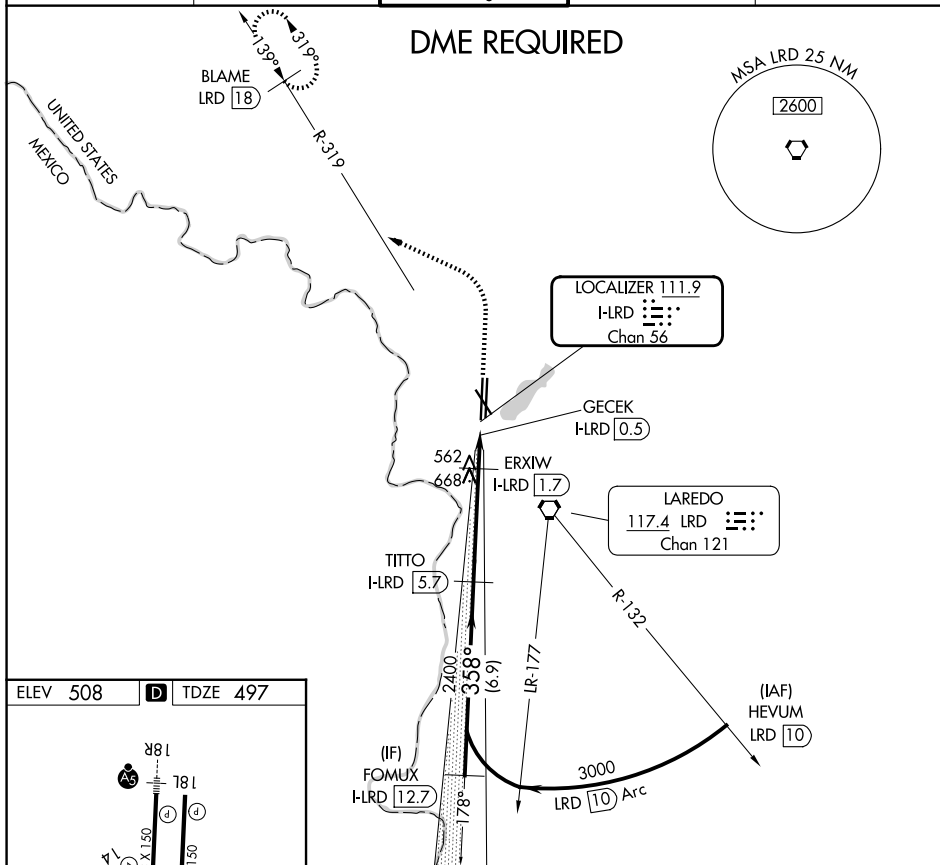


Diagram illustrating a 3D profile view of a 360° S-LOC. The diagram shows a 3000-foot MSL glide slope, a 2400-foot MSL glide slope, and a 1100-foot MSL glide slope. The distance between the 3000-foot and 2400-foot MSL points is 6.9 NM. The distance between the 2400-foot and 1100-foot MSL points is 4.1 NM. The distance between the 1100-foot and 600-foot MSL points is 1.2 NM. The distance between the 600-foot and 300-foot MSL points is 0.6 NM. The diagram includes a 3D profile view of the 360° S-LOC, showing the 3000-foot MSL glide slope, the 2400-foot MSL glide slope, and the 1100-foot MSL glide slope.

CATEGORY	A	B	C	D	E
S-LOC 36L	820-1 323 (400-1)				
CIRCLING	940-1 432 (500-1)	980-1 472 (500-1)	1100-1½ 592 (600-1½)	1200-2¼ 692 (700-2¼)	1200-2½ 692 (700-2½)