FYTTR SEVEN DEPARTURE (FYTTR7.FYTTR)

Amdt 6 12JUN25

LAS VEGAS, NEVADA
NELLIS AFB (KLSV)

ATIS
270.1
CLNC DEL
120.9 289.4
GND CON
121.8 275.8
TOWER
132.55 327.0
NELLIS CONTROL
119.35 254.4
DEP CON
135.1 350.225

TOP ALTITUDE: FL200

RADAR required

Rwy	Knots	60	120	180	240	300	360
3L ⓐ	V/V(fpm)	372	744	1116	1488	1860	2232
3R ⓑ	V/V(fpm)	384	768	1152	1536	1920	2304
21L ⓒ	V/V(fpm)	392	784	1176	1568	1960	2352
21R ⓒ	V/V(fpm)	394	788	1182	1576	1970	2364

Minimum Climb Rate
ⓐ to 10,000
ⓑ to 10,400
ⓒ to 13,600

CAUTION: If unable to comply with restrictions advise ATC prior to departure.

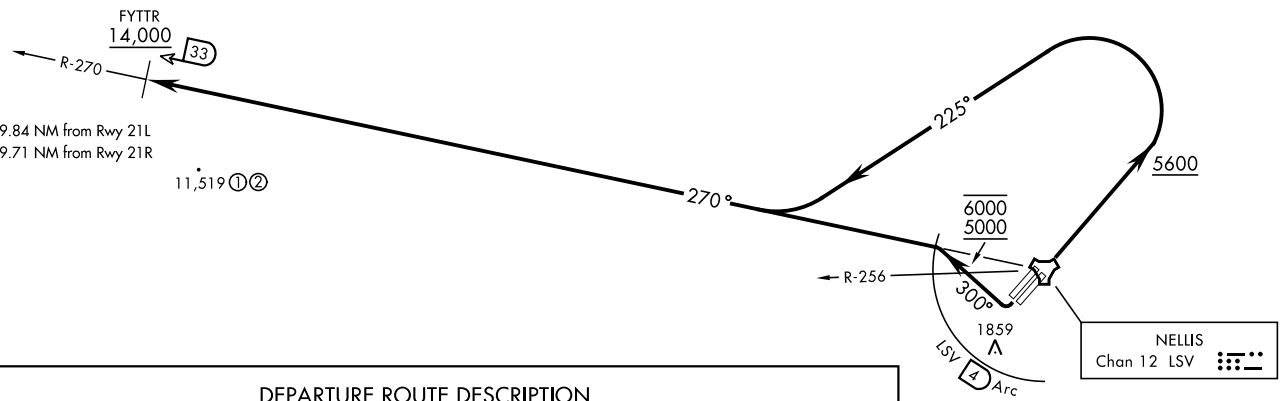

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3L/R: Fly runway heading until reaching 5600, then climbing left turn heading 225° to intercept LSV TACAN R-270 outbound. Cross FYTTR at or above 14,000, thence...

TAKEOFF RWY 21L/R: Turn right heading 300° to intercept LSV TACAN R-270, remain within LSV 4 DME until joining LSV R-270, cross LSV R-256 between 5000 and 6000. Cross FYTTR at or above 14,000, thence...

...maintain FL200 or as assigned by ATC, then via assigned route. Expect filed altitude 10 minutes after departure.



FYTTR SEVEN DEPARTURE (FYTTR7.FYTTR)

[USAF]

NELLIS AFB (KLSV)
LAS VEGAS, NEVADA

25163