


WAAS CH 53528 W18A	APP CRS 180°	Rwy Idg 5199 TDZE 430 Apt Elev 430
--	------------------------	---

RNAV (GPS) RWY 18
LAWRENCEVILLE-VINCENNES INTL (L WV)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F).
⚠ DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Carmel altimeter setting. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA 656 feet; increase LNAV/VNAV DA to 902 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM; and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2600 direct
VOCUT and hold.

ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) ①
----------------------	--	---------------------------------

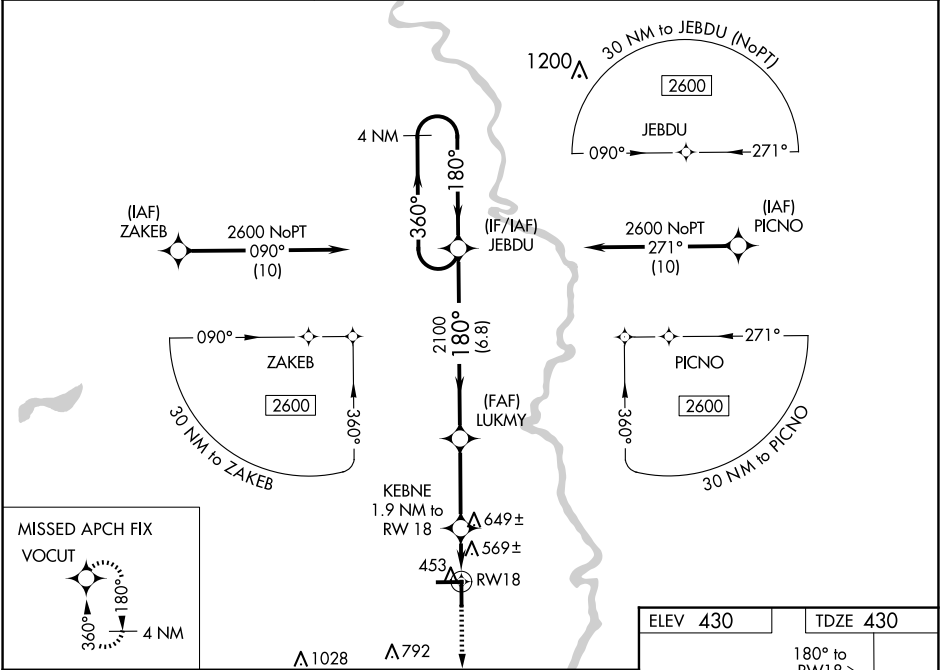

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).		2600	VOCUT
2600		JEBDU		LUKMY	KEBNE
GP 3.00° TCH 45		2100		1.9 NM to RWY 18	RWY 18
360° 180°		180°		*1060	
6.8 NM		3.2 NM		1.9 NM	
CATEGORY	A	B	C	D	
LPV DA	630-¾		200 (200-¾)		
LNAV/VNAV DA	876-1½		446 (500-1½)		
LNAV MDA	940-1	510 (600-1)	940-1¾	510 (600-1¾)	
CIRCLING	940-1	510 (600-1)	940-1½	1160-2¼	730 (800-2¼)

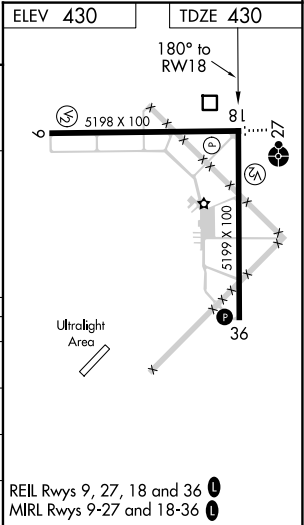

EC-3, 02 OCT 2025 to 30 OCT 2025

EC-3, 02 OCT 2025 to 30 OCT 2025