| WAAS CH 93728 W09A | APP CRS 090° | Rwy ldg 5198<br>TDZE 428<br>Apt Elev 430 |
|---|---|---|

# RNAV (GPS) RWY 9

## LAWRENCEVILLE-VINCENNES INTL (LWV)

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA to 704 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 855 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH: Climb to 2600 direct YONUB and hold.

| ASOS | EVANSVILLE APP CON ★ | UNICOM |
|---|---|---|
| 118.0 | 125.6 343.7 | 122.8 (CTAF) L |

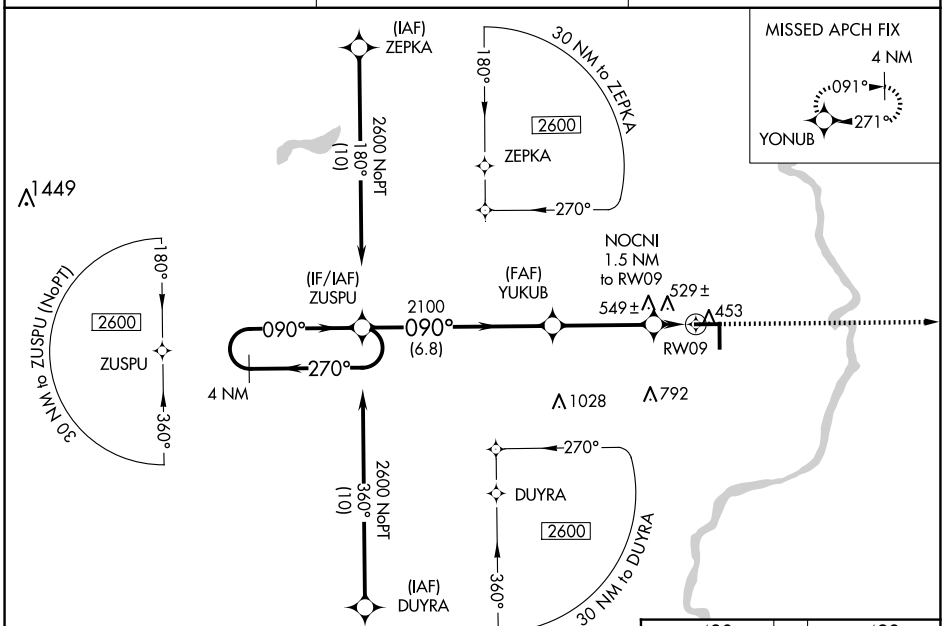


| ELEV 430 | TDZE 428 |
|---|---|

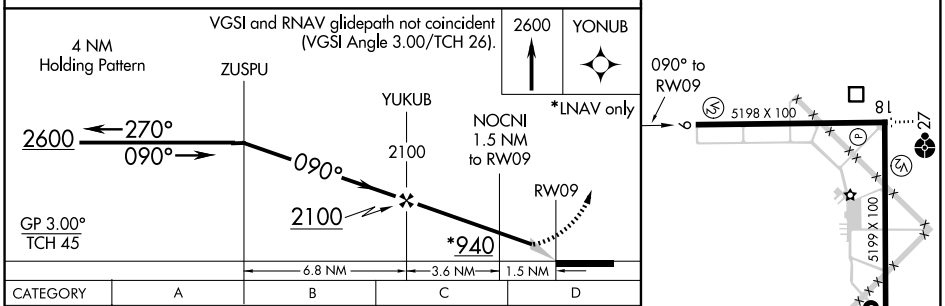


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 678-¾ 250 (300-¾) | | | |
| LNAV/VNAV DA | 829-1⅜ 401 (400-1⅜) | | | |
| LNAV MDA | 820-1 392 (400-1) | | 820-1⅛ 392 (400-1⅛) | |
| CIRCLING | 880-1 450 (500-1) | 900-1 470 (500-1) | 940-1½ 510 (600-1½) | 1160-2¼ 730 (800-2¼) |

REIL Rwys 9, 27, 18 and 36 L
MIRL Rwys 9-27 and 18-36 L

EC-3, 02 OCT 2025 to 30 OCT 2025

EC-3, 02 OCT 2025 to 30 OCT 2025