

FORT SILL, OKLAHOMA

RNAV (GPS) RWY 18


APCH CRS	Rwy Idg	5002
176°	TDZE	1188
	Arpt Elev	1188

-(USA)

HENRY POST AAF (KFSI)

RNP APCH	MISSED APPROACH: Climb to 3500 direct to FESAD and hold.
----------	--

ATIS 135.425 354.025	FORT SILL APP CON/DEP CON 120.55 322.4	CLNC DEL 121.7 279.575	CTAF 124.95 0*	ASR
-------------------------	---	---------------------------	-------------------	-----

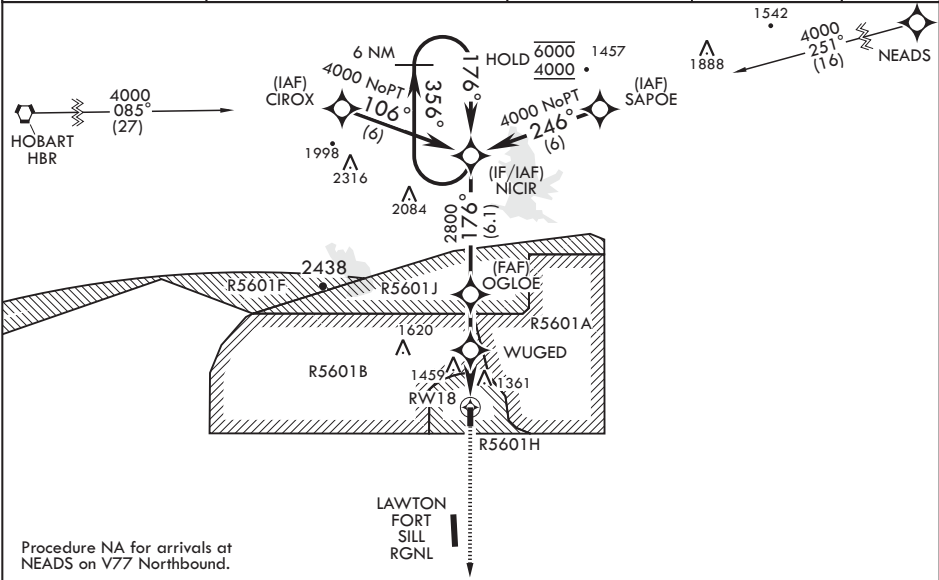


Procedure NA for arrivals at NEADS on V77 Northbound.

When local altimeter setting not received, use Lawton-Fort Sill RGNL altimeter setting.

For uncompensated Baro-VNAV systems, Procedure NA below -17°C or above 54°C.

Procedure NA for arrival on HBR VORTAC Airway Radials 354 CW 175.

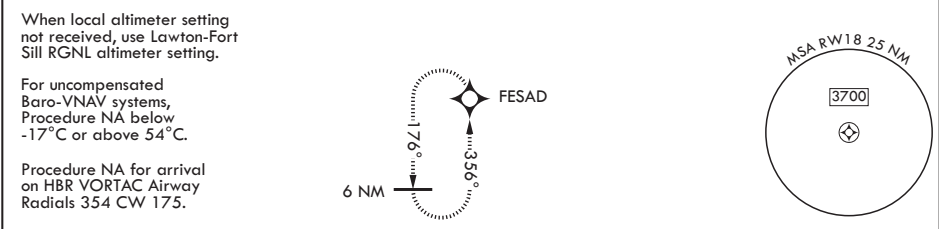

6 NM Holding Pattern	NICIR	3500 FESAD	ELEV 1188	TDZE 1188
6000	356°	OGLOE	176°	
4000	176°	WUGED	2800	
		2020	1.2 NM to RW18	
		2.4 NM	2.5 NM	
GP 3.00°				
TCH 44				
CATEGORY	A	B	C	D
LNAV/VNAV DA	1673-1 $\frac{3}{8}$	485	(500-1 $\frac{3}{8}$)	
LNAV MDA	1600-1 412 (500-1)	1600-1 $\frac{1}{8}$ 412 (500-1 $\frac{1}{8}$)	1820-1 $\frac{1}{4}$ 412 (500-1 $\frac{1}{4}$)	1920-2 $\frac{1}{4}$ 412 (500-2 $\frac{1}{4}$)
CIRCLING	1680-1 492 (500-1)	1760-1 572 (600-1)	1820-1 $\frac{1}{4}$ 632 (700-1 $\frac{1}{4}$)	1920-2 $\frac{1}{4}$ 732 (800-2 $\frac{1}{4}$)