

LOC/DME I-LNR <u>108.35</u> Chan 20(Y)	APP CRS 270°	Rwy Ldg 5000 TDZE 717 Apt Elev 717
--	-----------------	--


LOC RWY 27
TRI-COUNTY RGNL (LNR)

DME required. RADAR required for procedure entry.

	Circling Rwy 18, 36 NA at night. Rwy 27 helicopter visibility reduction below $\frac{1}{4}$ SM NA. If local altimeter setting not received, use
	Dane County Rgnl-Truxav Flt altimeter setting and increase all MDA 120 feet.
	Increase S-27 visibility Cat A/B $\frac{1}{4}$ SM, Cat C $\frac{1}{2}$ SM, Circling visibility Cat B $\frac{1}{4}$ SM, Cat C $\frac{1}{2}$ SM. Increase BOCAV fix minimums S-27 visibility Cat C $\frac{1}{4}$ SM, Circling Cat A/B $\frac{1}{4}$ SM, Cat C $\frac{1}{2}$ SM.

MISSED APPROACH:
Climb to 2200 then climbing
right turn to 3300 on heading
070° and on DLL R-224 to
LENRE/DLL VORTAC 18 DME
and hold.

ASOS 119.425	MADISON APP CON ★ 135.45 343.7	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

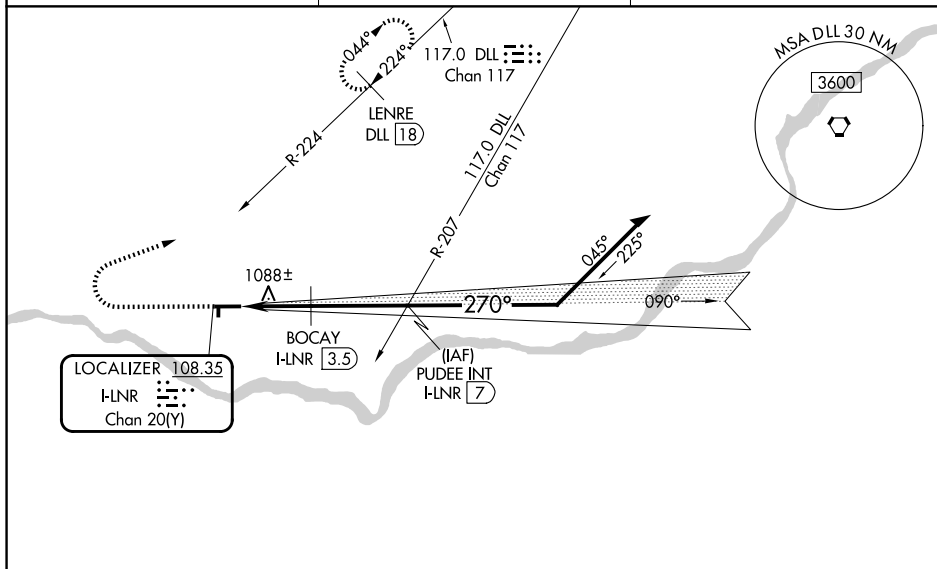

ELEV 717 TDZE 717

VGSI and descent angles not coincident
[VGSI Angle 4.00/TCH 35].

270°

5000 X 7.5

1850 X 60

36

27

2700

090°

2700

*1680 when using Dane County Rgnl-Truax Fld altimeter setting.

CATEGORY	A	B	C	D
S-LOC 27	1580-1 863 (900-1)	1580-1¼ 863 (900-1¼)	1580-2½ 863 (900-2½)	NA
CIRCLING	1580-1¼	863 (900-1¼)	1580-2½ 863 (900-2½)	NA

BOCAY FIX MINIMUMS

S-LOC 27	1360-1 643 (700-1)	1360-1¾ 643 (700-1¾)	NA
CIRCLING	1520-1 803 (900-1)	1560-2½ 843 (900-2½)	NA

LONE ROCK, WISCONSIN

Amdt 1 05NOV20

43°13'N-90°11'W

TRI-COUNTY RGNL (LNR)

LOC RWY 27