APP CRS	Rwy ldg	10000
350°	TDZE	464
	Apt Elev	501

RNAV (RNP) Z RWY 35L
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 direct DAMEN and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

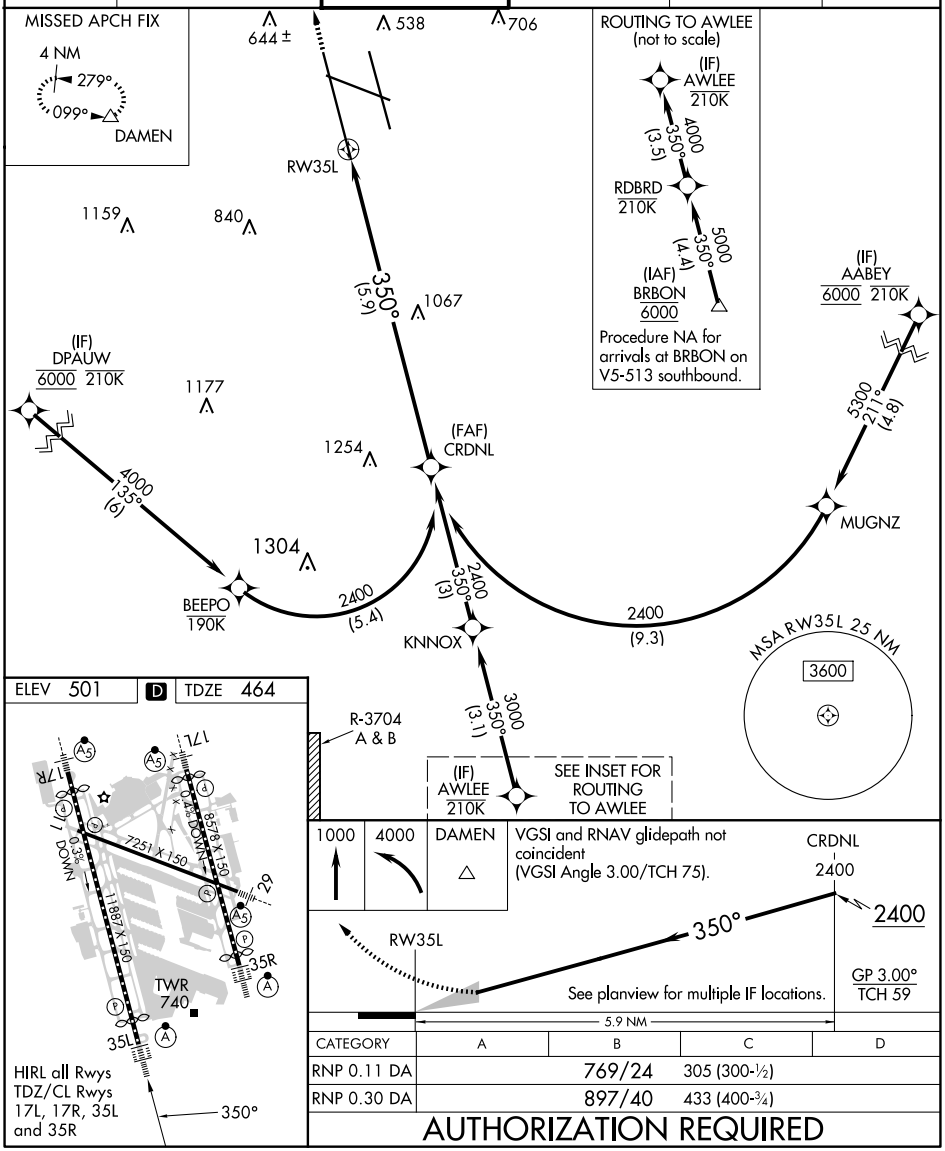

CATEGORY	A	B	C	D
RNP 0.11 DA	769/24		305 (300-½)	
RNP 0.30 DA	897/40		433 (400-¾)	

AUTHORIZATION REQUIRED

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025