

LOC/DME I-LBB	APP CRS	Rwy Idg	11500
111.7	174°	TDZE	3282
Chan 54		Apt Elev	3282



ILS or LOC RWY 17R
LUBBOCK PRESTON SMITH INTL (LBB)

⚠ For inop MALSR, increase S-ILS 17R Cat E visibility to RVR 4000, S-LOC 17R Cat C/D/E visibility to 1/2 mile, and NUSNE DME Fix Minimums, increase S-LOC 17R Cat C/D/E visibility to RVR 5000.
#RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR
AS

MISSED APPROACH: Climb to 3700 then climbing left turn to 6000 via LBB VORTAC R-114 to HYDRO INT/LBB 14.2 DME and hold, continue climb-in-hold to 6000.

ATIS 125.3 270.275	LUBBOCK APP CON 119.2 351.8	LUBBOCK TOWER 120.5 239.3	GND CON 121.9 348.6	CLNC DEL 125.8 281.55
-----------------------	--------------------------------	------------------------------	------------------------	--------------------------

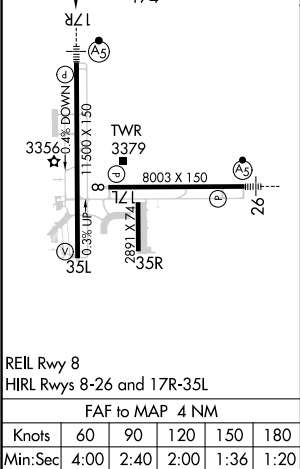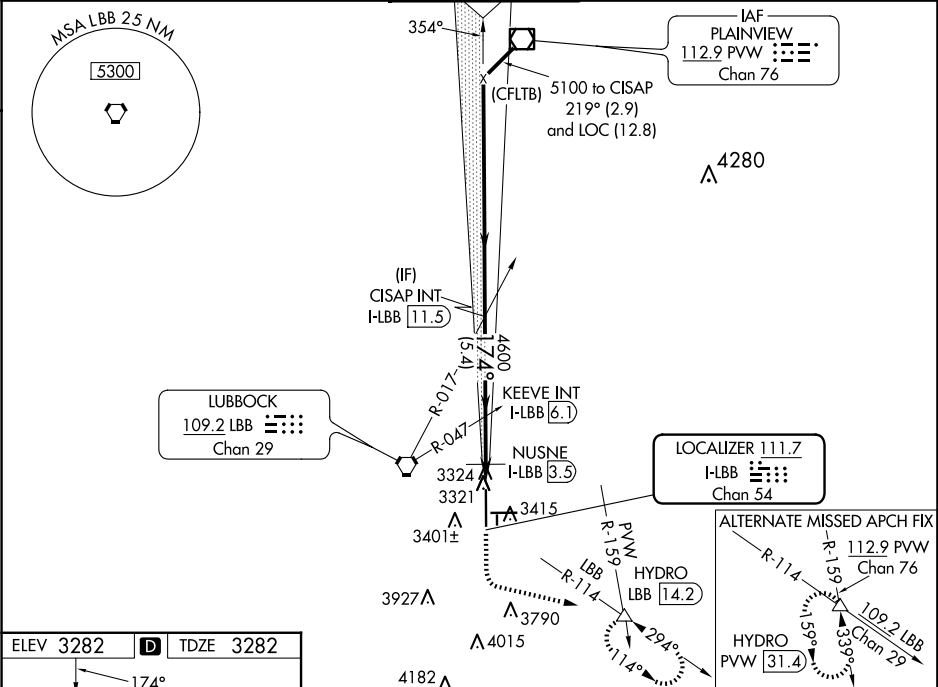

ELEV 3282	D	TDZE 3282
3700	6000	HYDRO
VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 69).		
*LOC only.	*H-LBB	NUSNE I-LBB 3.5
I-LBB 2.1	I-LBB 3	I-LBB 6.1
3780	4600	5100
0.8 NM	0.6 NM	2.6 NM
CISAP INT I-LBB 11.5		
GS 3.00° TCH 53		
CATEGORY	A	B
S-ILS 17R	#3482/24 200 (200-1/2)	
S-LOC 17R	3780/24 498 (500-1/2)	3780/50 498 (500-1)
CIRCLING	3780-1 498 (500-1)	3880-1 1/2 598 (600-1 1/2) 3940-2 658 (700-2) 4100-3 818 (900-3)
NUSNE FIX MINIMUMS (DME REQUIRED)		
S-LOC 17R	3620/24 338 (400-1/2)	3620/26 338 (400-1/2)
CIRCLING	3720-1 438 (500-1) 3740-1 458 (500-1)	3880-1 1/2 598 (600-1 1/2) 3940-2 658 (700-2) 4100-3 818 (900-3)

SC-2, 02 OCT 2025 to 30 OCT 2025

SC-2, 02 OCT 2025 to 30 OCT 2025