

WAAS
CH **45528**
W26A

APP CRS
264°

Rwy Idg
TDZE
Apt Elev
8003
3256
3282

RNAV (GPS) RWY 26


LUBBOCK PRESTON SMITH INTL (LBB)

RNP APCH.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 52°C.
▲ For inop ALS, increase LPV Cat E visibility to RVR 4000; increase LNAV/VNAV Cat E visibility to RVR 5000; and increase LNAV Cat C/D/E visibilities to RVR 4500.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR
▲

MISSED APPROACH:
Climb to 5200 direct KAPWU and hold.

ATIS 125.3 270.275	LUBBOCK APP CON 119.2 351.8	LUBBOCK TOWER 120.5 239.3	GND CON 121.9 348.6	CLNC DEL 125.8 281.55
------------------------------	---------------------------------------	-------------------------------------	-------------------------------	---------------------------------

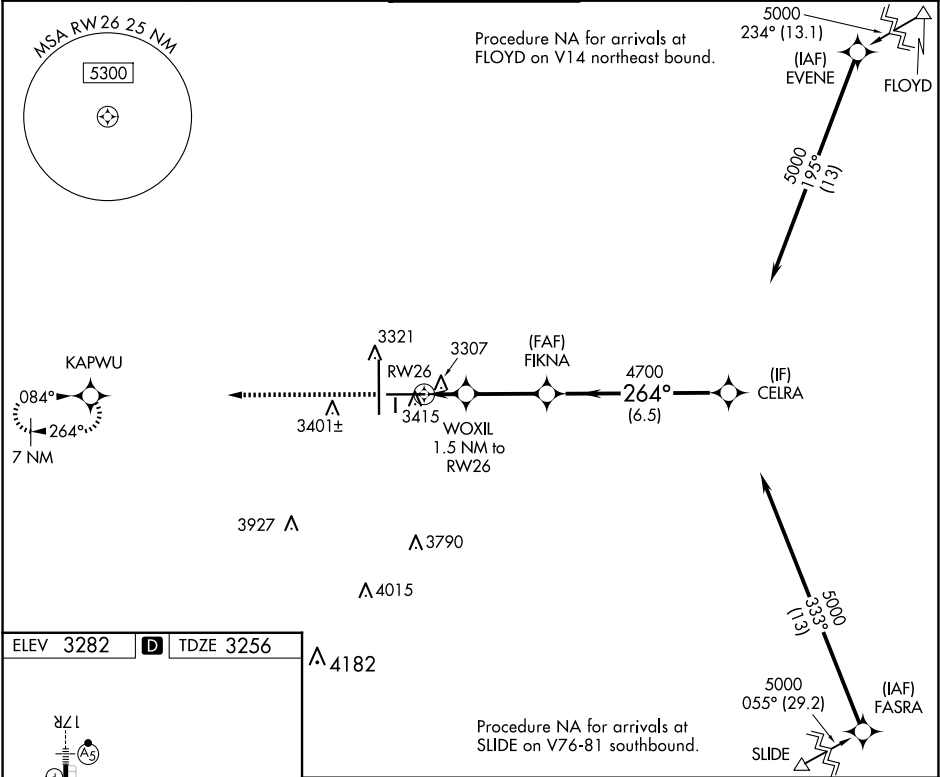

ELEV **3282** **D** TDZE **3256**

REIL Rwy 8
HIRL Rwy 8-26 and 17R-35L

5200 KAPWU
*INAV only.

WOXIL 1.5 NM to RW26

FIKNA 4700

CELRA 5000

GP 3.00° TCH 50

CATEGORY	A	B	C	D	E
LPV DA**	3456/24		200 (200-½)		
LNAV/VNAV DA	3579/26		323 (300-½)		
LNAV MDA	3560/24		304 (300-½)		
CIRCLING	3720-1 438 (500-1)	3740-1 458 (500-1)	3880-1½ 598 (600-1½)	3940-2 658 (700-2)	4100-3 818 (900-3)

SC-2, 02 OCT 2025 to 30 OCT 2025

SC-2, 02 OCT 2025 to 30 OCT 2025