

WAAS CH 40028 W17A	APP CRS 174°	Rwy Idg TDZE 3282 Apt Elev 3282
--	------------------------	---

RNAV (GPS) Y RWY 17R
LUBBOCK PRESTON SMITH INTL (LBB)

RNP APCH.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 51°C.
▲ For inop ALS increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 5000 and LNAV Cat A/B visibility to RVR 5500 and Cat C/D/E visibility to RVR 6000.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 5400 direct
ZOVOC and hold.

ATIS 125.3 270.275	LUBBOCK APP CON 119.2 351.8	LUBBOCK TOWER 120.5 239.3	GND CON 121.9 348.6	CLNC DEL 125.8 281.55
------------------------------	---------------------------------------	-------------------------------------	-------------------------------	---------------------------------

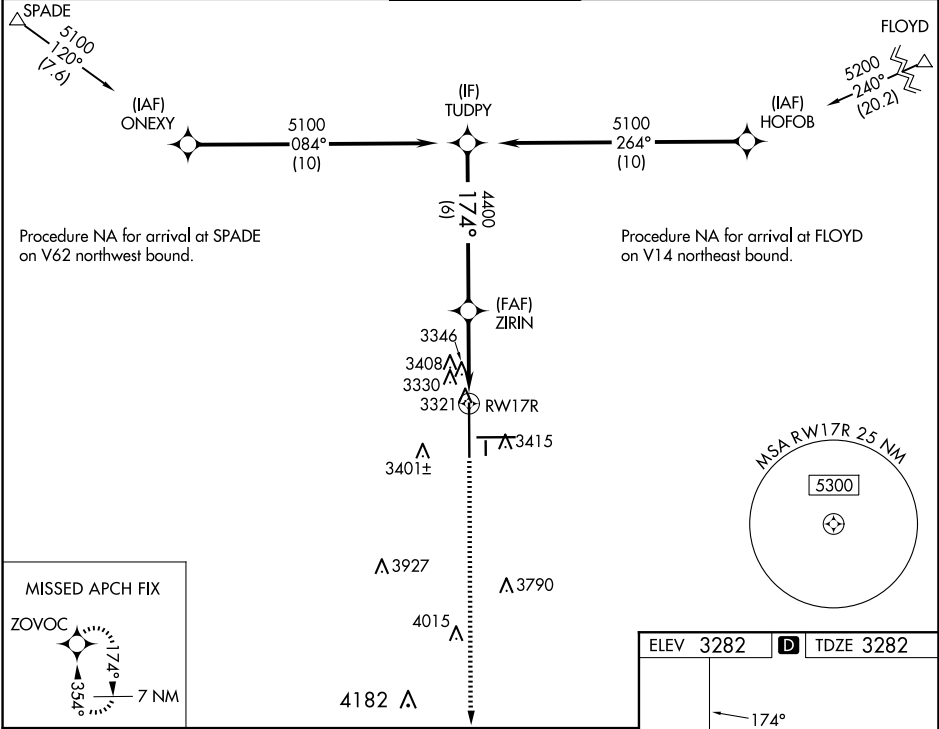

TUDPY VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 69).					5400	ZOVOC
GP 3.00° TCH 53					174°	
ZIRIN 4400					*1 NM to RW17R	*LNAV only.
RW17R					6 NM	2.3 NM
CATEGORY	A	B	C	D	E	
LPV DA **	3482/24 200 (200-½)					
LNAV/VNAV DA	3591/24 309 (400-½)					
LNAV MDA	3700/24	418 (500-½)	3700/40	418 (500-¾)		
CIRCLING	3720-1 438 (500-1)	3740-1 458 (500-1)	3880-1½ 598 (600-1½)	3940-2 658 (700-2)	4100-3 818 (900-3)	

