


LOC I-MCN	APP CRS	Rwy Idg
109.5	054°	6221
		TDZE
		344
		Apt Elev
		354

ILS or LOC RWY 5
MIDDLE GEORGIA RGNL (MCN)

DME and RADAR required.	MALSR	MISSED APPROACH: Climb to 800 then climbing right turn to 3000 on heading 090° and DBN VORTAC R-314 to TRUKR/DBN VORTAC 15 DME/RADAR and hold.
⚠ DME from MCN VORTAC. Simultaneous reception of I-MCN and MCN DME required. For inop ALS, increase S-ILS 5 Cat E visibility to RVR 4000 and S-LOC 5 Cats C, D, and E visibilities to 1 3/8 SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS	ATLANTA APP CON *	MACON TOWER *	GND CON	UNICOM
120.775	124.2 279.6	128.2 (CTAF) 0 257.8	121.65	122.95

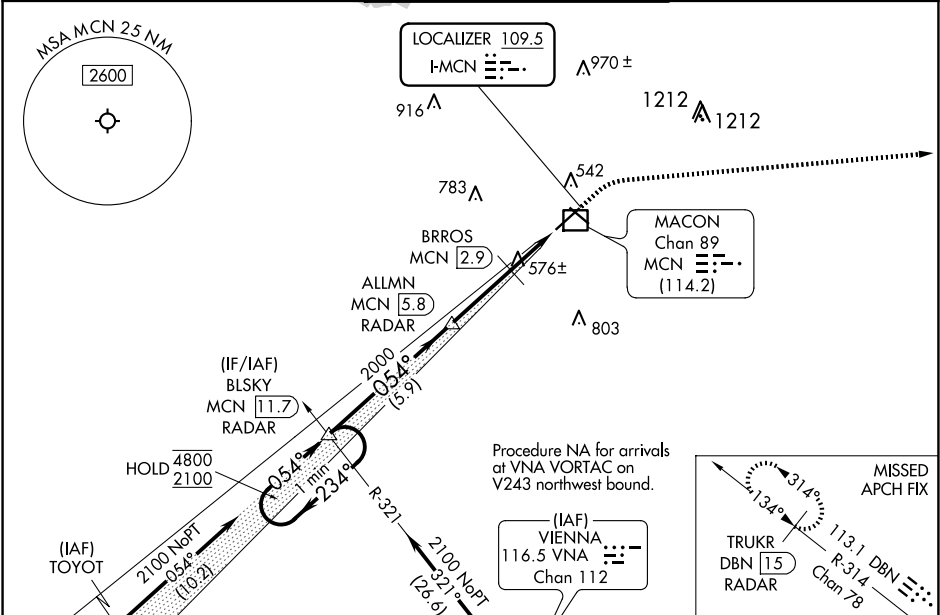

ELEV 354	D	TDZE 344
One Minute Holding Pattern	BLSKY MCN 11.7 RADAR	ALLMN MCN 5.8 RADAR
4800 2100	234° 054°	2000 1080
GS 3.00° TCH 56	5.9 NM	2.9 NM
CATEGORY	A	B
S-ILS 5 *	544/24	200 (200-1/2)
S-LOC 5	840/24	496 (500-1/2)
CIRCLING	900-1	546 (600-1)
	566 (600-1 1/2)	766 (800-2 1/2)
	1120-2 1/2	1180-3
	826 (900-3)	

SE-4, 02 OCT 2025 to 30 OCT 2025

SE-4, 02 OCT 2025 to 30 OCT 2025