

WAAS CH 42829 W21A	APP CRS 212°	Rwy Ldg TDZE 887 Apt Elev 887	7015
--	------------------------	---	-------------

RNAV (GPS) RWY 21



DANE COUNTY RGNL/TRUAX FLD (MSN)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1¾ mile and LNAV Cat C/D visibility to 1½ mile.

MALSR

MISSED APPROACH:
Climb to 3600 direct
WIROD and hold.

ATIS 124.65 278.3	MADISON APP CON★ 135.45 343.7	MADISON TOWER★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-------------------------

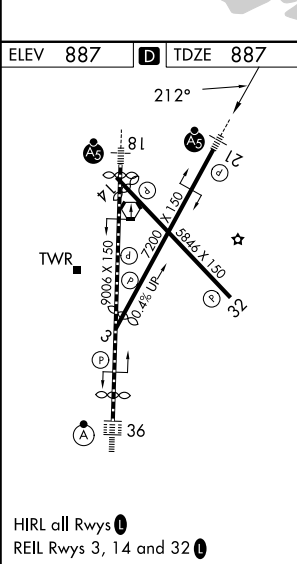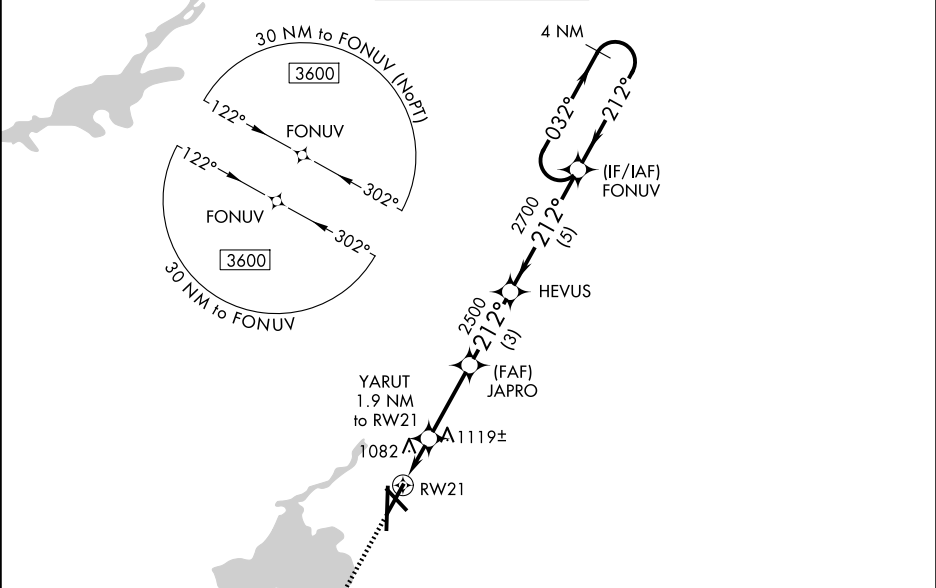

3600	WIROD	* LNAV only	FONUV	4 NM Holding Pattern
YARUT 1.9 NM to RW21	JAPRO 2500	HEVUS	212°	032°
* 1.4 NM to RW21	* 1540	2500	2700	3600
1.4 NM	0.5	3 NM	5 NM	
CATEGORY	A	B	C	D
LPV DA	1087-½	200 (200-½)		
LNAV/VNAV DA	1412-1⅓	525 (600-1⅓)		
LNAV MDA	1380-½	493 (500-½)	1380-1	493 (500-1)
CIRCLING	1420-1 533 (600-1)	1460-1 573 (600-1)	1460-1½ 573 (600-1½)	1700-2¾ 813 (900-2¾)