


WAAS CH 56201 W27B	APP CRS 274°	Rwy Ldg TDZE Apt Elev	9482 26 33
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 27L
MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct SUROY and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below 2°C or above 54°C.	

ATIS 132.55	ORLANDO APP CON 126.025 281.425	MELBOURNE TOWER ★ 118.2 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

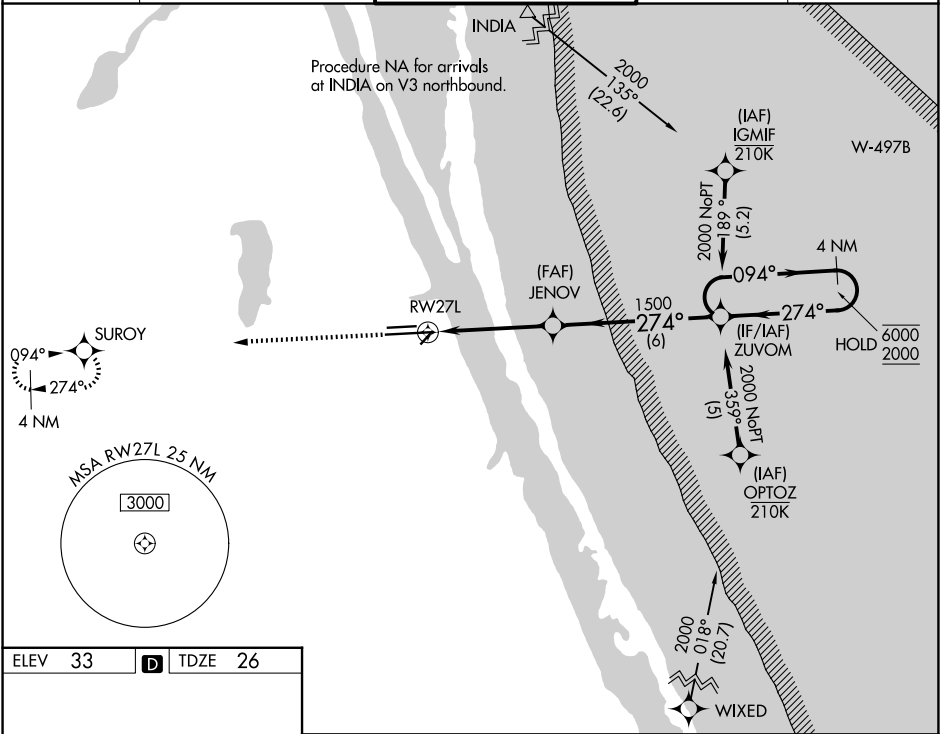

ELEV 33	D	TDZE 26
---------	----------	---------

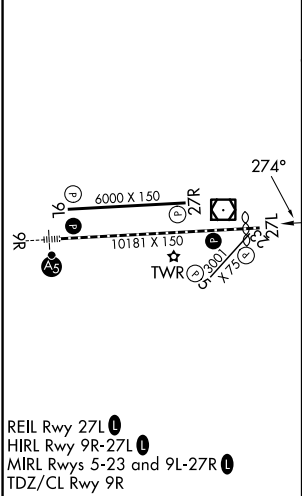

2000	SUROY			
		JENOV	ZUVOM	4 NM Holding Pattern
		1500		
		1.3 NM to RW27L		
		1.3 NM	3.2 NM	6 NM
CATEGORY	A	B	C	D
LPV DA		226-¾	200 (200-¾)	
LNAV/VNAV DA		318-¾	292 (300-¾)	
LNAV MDA	500-1	474 (500-1)	500-1¾	474 (500-1¾)
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)