

WAAS
CH **60901**
W09B

APP CRS
094°

Rwy Ldg **10181**
TDZE **32**
Apt Elev **33**

RNAV (GPS) RWY 9R
MELBOURNE ORLANDO INTL (MLB)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.

MALSR

MISSED APPROACH: Climb to 2000 direct ZUVOM and hold.

ATIS 132.55	ORLANDO APP CON 126.025 281.425	MELBOURNE TOWER ★ 118.2(CTAF) 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

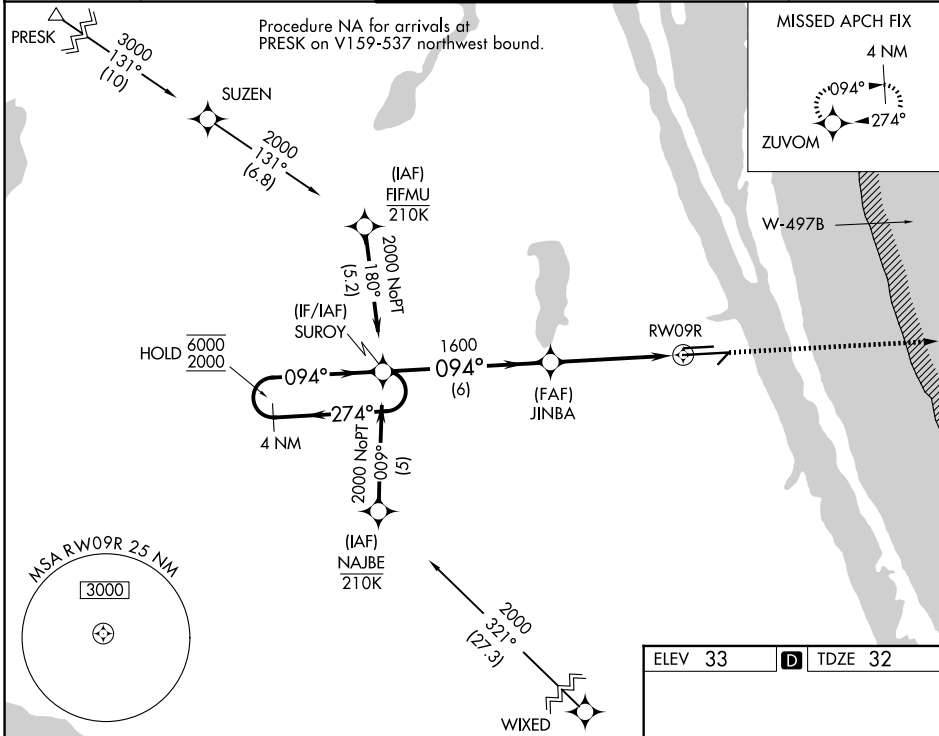

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 83).

SUROY

JINBA

RWY09R

ZUVOM

GP 3.00° TCH 55

6 NM

3.6 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	232/18 200 (200-½)			
LNAV/VNAV DA	427/35 395 (400-⅝)			
LNAV MDA	480/24 448 (500-½)	480/45 448 (500-⅞)		
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)

REIL Rwy 27L

HIRL Rwy 9R-27L

MIRL Rws 5-23 and 9L-27R

TDZ/CL Rwy 9R