

MIAMI, FLORIDA

AL-257 (FAA)

25275

WAAS CH 42703 W08A	APP CRS 092°	Rwy Ldg 8600 TDZE 9 Apt Elev 9
--	------------------------	---



RNAV (GPS) RWY 8L
MIAMI INTL (MIA)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 9. Rwy 8L helicopter visibility reduction below ¾ SM NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct BRBRA and hold.

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6
-------------------------	--------------------------------------	-----------------------------------	---

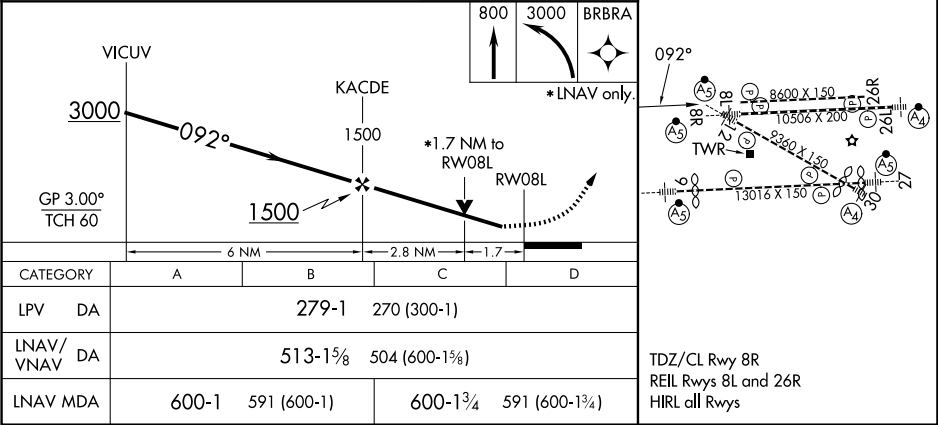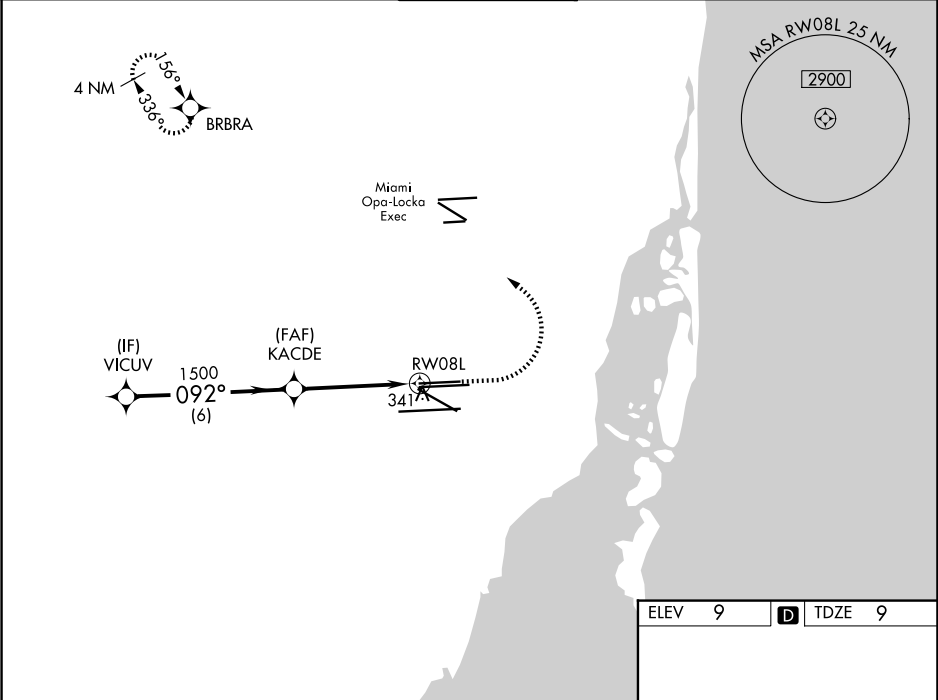

MIAMI, FLORIDA
Amdt 2B 30JAN20

25°48'N-80°17'W

MIAMI INTL (MIA)
RNAV (GPS) RWY 8L

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025