
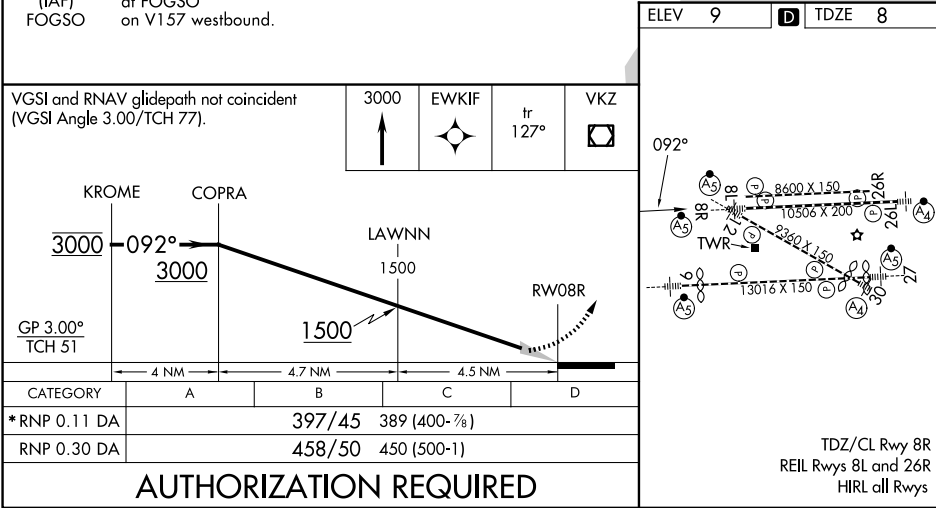


APP CRS	Rwy Ldg 10506
092°	TDZE 8
	Apt Elev 9

RNAV (RNP) Y RWY 8R
MIAMI INTL (MIA)

▼ For uncompensated Baro-VNAV systems, procedure NA below 6°C (43°F) or above 54°C (130°F). GPS required. For inop MALSR, increase RNP 0.11 all Cats visibility to 1¼ mile. *Missed approach requires minimum climb of 330 feet per NM to 600.	MALSR 	MISSED APPROACH: Climb to 3000 direct EWKIF and on track 127° to VKZ VOR/DME and hold, continue climb-in-hold to 3000.
--	--	---

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 348.6 127.5 (9/27/30)
-------------------------	--------------------------------------	-----------------------------------	---

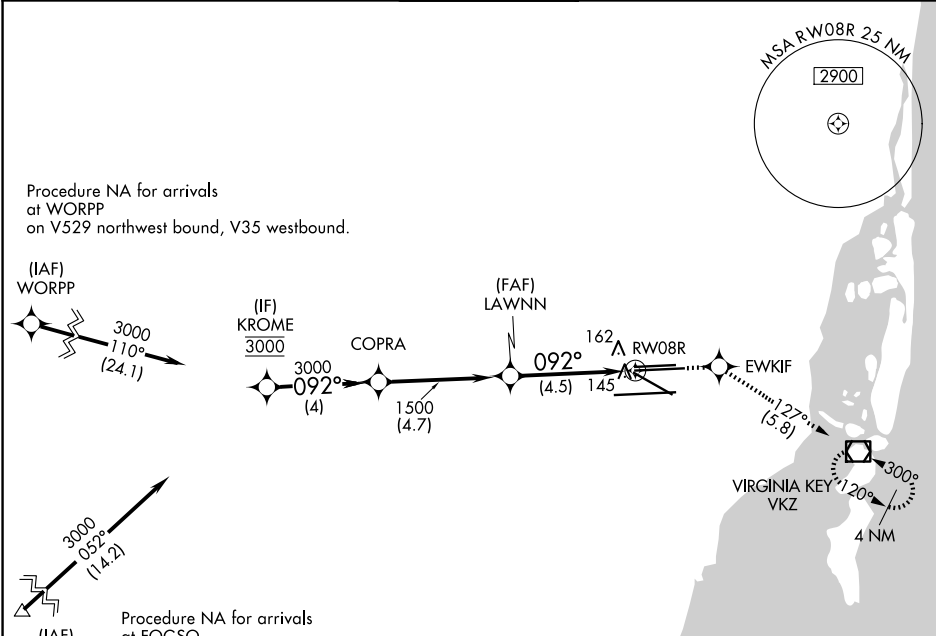

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025