

MIAMI, FLORIDA

AL-257 (FAA)

25275

APP CRS	Rwy Ldg	12755
272°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 27

MIAMI INTL (MIA)

RNP AR APCH-GPS.




Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.

MALSR



MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6
------------------	-------------------------------	----------------------------	--

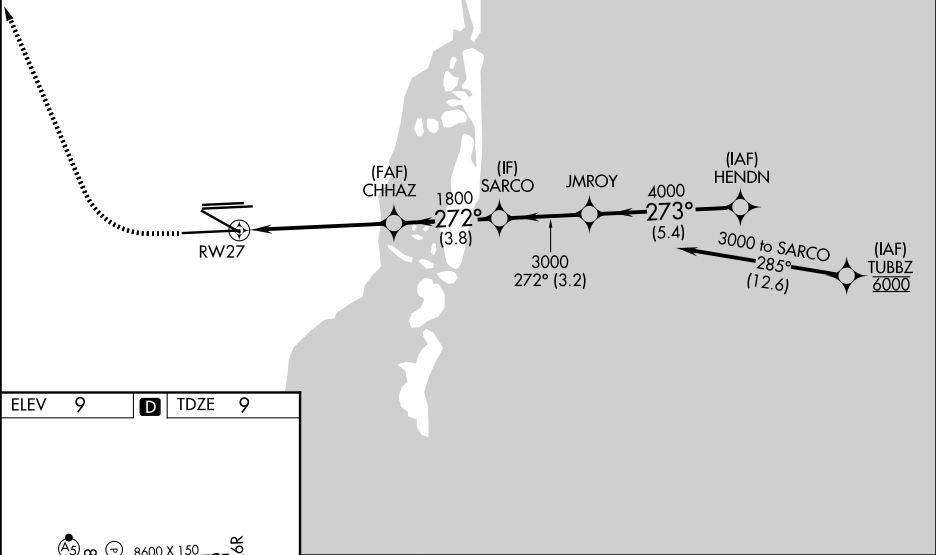

ELEV 9 TDZE 9

TDZ/CL Rwy 8R
REIL Rwy 8L and 26R
HIRL all Rwy

CATEGORY	A	B	C	D
RNP 0.11 DA	327/24 318 (400-1/2)			
RNP 0.30 DA	405/35 396 (400-5/8)			

AUTHORIZATION REQUIRED

MIAMI, FLORIDA
Amdt 3 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Z RWY 27

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025