


WAAS CH 61329 W16A	APP CRS 166°	Rwy Ldg TDZE Apt Elev	9501 2872 2872
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16R

MIDLAND INTL AIR AND SPACE PORT (M.A.F.)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Rwy 16R helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. Circling Rwy 16L NA at night.			MISSED APPROACH: Climb to 4700 direct ICORO and hold.	
ATIS 126.8 235.975	MIDLAND APP CON* 124.6 290.4	MIDLAND TOWER* 118.7 (CTAF) 273.45	GND CON 121.9 348.6	UNICOM 122.95

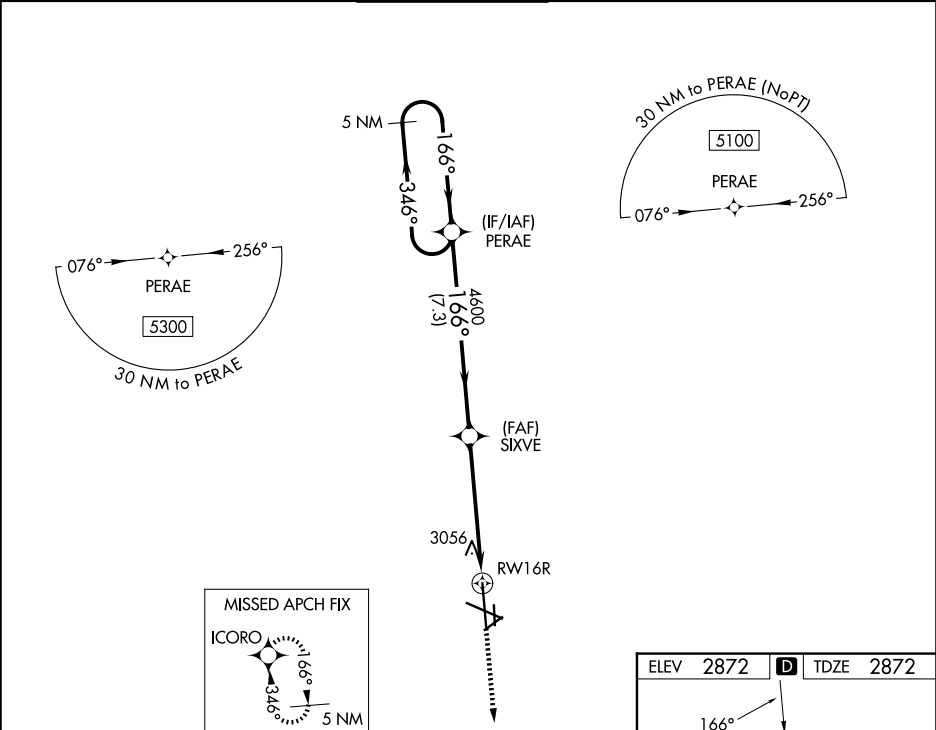

5 NM Holding Pattern		PERAE	SIXVE	4700	ICORO
5100 ← 346°		166° →	4600		
GP 3.00°			4600	*1.4 NM to RW16R	*LNAV only
TCH 50					
		7.3 NM	3.9 NM	1.4	
CATEGORY	A	B	C	D	
LPV DA	3072-¾		200 (200-¾)		
LNAV/VNAV DA	3398-1¾		526 (600-1¾)		
LNAV MDA	3360-1	488 (500-1)	3360-1¾	488 (500-1¾)	
CIRCLING	3440-1	568 (600-1)	3440-1½	3520-2	
			568 (600-1½)	648 (700-2)	

