


WAAS CH 86715 W31A	APP CRS 306°	Rwy Idg TDZE 583 Apt Elev 590
--	------------------------	---

RNAV (GPS) RWY 31
QUAD CITIES INTL (MLI)


⚠ Circling to Rwy 5 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting and increase LPV DA to 1078 feet and LNAV/VNAV DA to 1207 feet and all MDA 60 feet, increase LPV all Cats, LNAV/VNAV all cats, LNAV Cats C and D, and Circling Cats C and D visibility ¼ SM. Baro-VNAV and VDP NA when using Davenport altimeter setting. Rwy 31 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct ALECU and on track 235° to MUTME and on track 165° to MZV VOR/DME and hold.

ATIS 121.2	QUAD CITY APP CON ★ 125.95 257.8	QUAD CITY TOWER ★ 119.4 (CTAF) 269.55	GND CON 121.9	CLNC DEL 124.05	UNICOM 122.95
----------------------	--	---	-------------------------	---------------------------	-------------------------

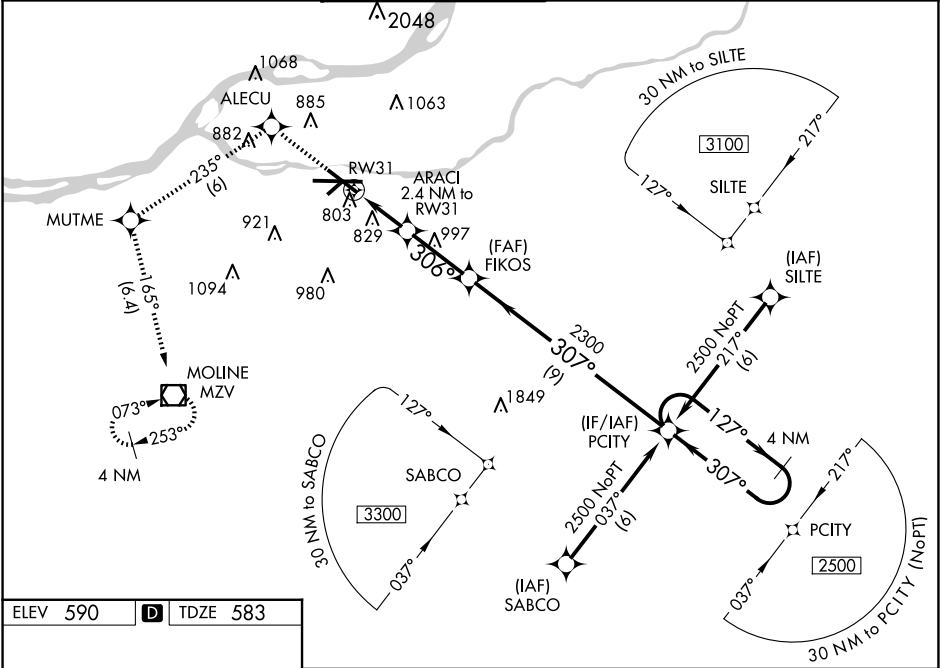

ELEV 590	D	TDZE 583
----------	----------	----------

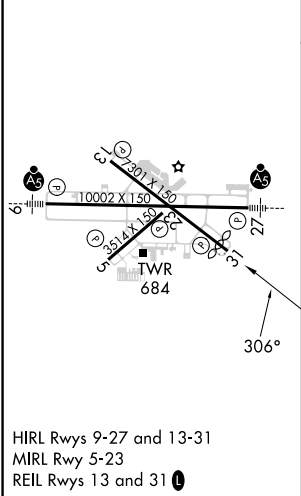

3000 ↑	ALECU ✧	tr 235° ✧	MUTME ✧	tr 165° ✧	MZV ◻	PCITY 4 NM Holding Pattern	
*LNAV only		ARACI 2.4 NM to RW31		FIKOS		127° → 2500 ← 307°	
RW31 ↓		*1.4 NM to RW31		306°		GP 3.00° TCH 48	
1.4		1 NM		2.8 NM		9 NM	
CATEGORY	A		B		C		D
LPV DA	1031-1½				448 (500-1½)		
LNAV/VNAV DA	1160-2				577 (600-2)		
LNAV MDA	1080-1		497 (500-1)		1080-1¼ 497 (500-1¼)		1080-1½ 497 (500-1½)
CIRCLING	1140-1 550 (600-1)		1200-1 610 (700-1)		1320-2 730 (800-2)		1420-2¾ 830 (900-2¾)

EC-3, 02 OCT 2025 to 30 OCT 2025

EC-3, 02 OCT 2025 to 30 OCT 2025