
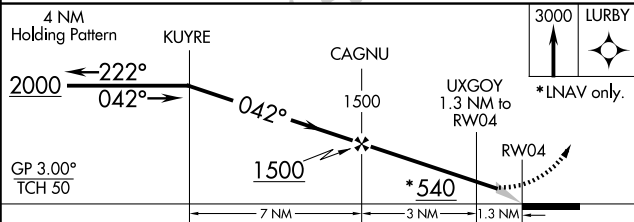


WAAS CH 56410 W04A	APP CRS 042°	Rwy Idg 7504 TDZE 78 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 4

MONROE RGNL (MLU)

RNP APCH.				MALSR	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling Rwy 14 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA.				ASR  MISSED APPROACH: Climb to 3000 direct LURBY and hold.	
ATIS	MONROE APP CON ★	MONROE TOWER ★	GND CON	CLNC DEL	UNICOM
125.05	118.15 290.475	118.9 (CTAF) 0 257.8	121.9	121.65	122.95

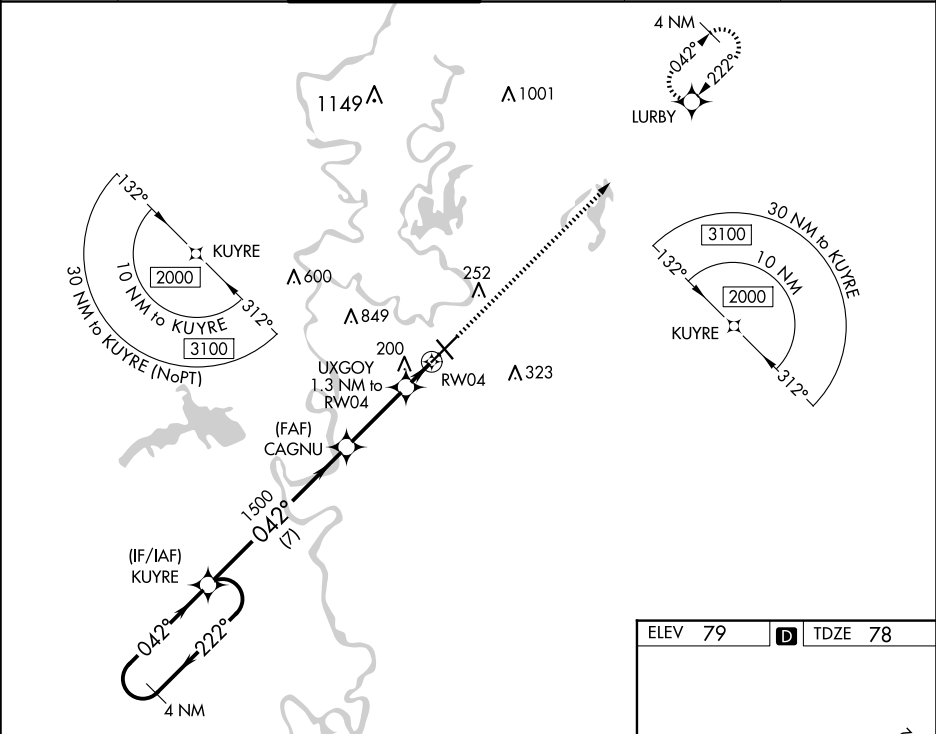

CATEGORY	A	B	C	D
LPV DA **		278/24	200 (200-½)	
LNAV/VNAV DA		383/24	305 (400-½)	
LNAV MDA	460/24	382 (400-½)	460/35	382 (400-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

