

VORTAC MLU	APP CRS	Rwy Idg	7504
117.2	236°	TDZE	78
Chan 119		Apt Elev	79

VOR RWY 22

MONROE RGNL (MLU)

DME required.

⚠


Circling Rwy 14 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-22 Cat A/B ASR visibility to 1 SM, and Cat C/D to 1½ SM.

MALS R


⚠

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.

ATIS	MONROE APP CON	MONROE TOWER	GND CON	CLNC DEL	UNICOM
125.05	118.15 290.475	118.9 (CTAF) 257.8	121.9	121.65	122.95

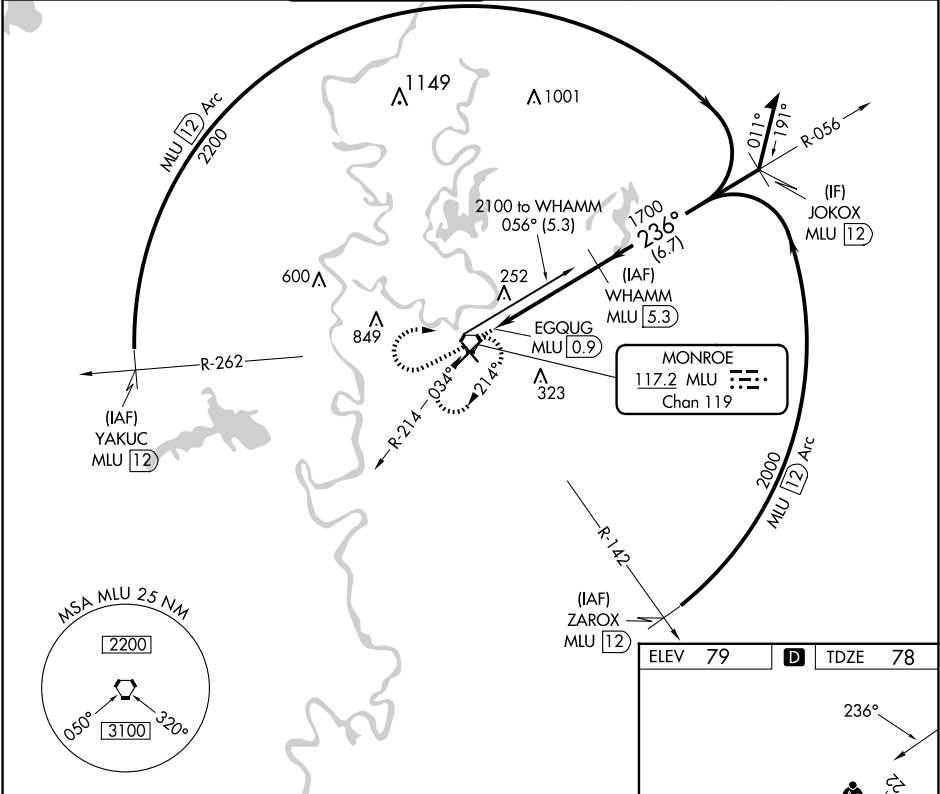

1800	3000	MLU				
↑	↷	⬡				
			WHAMM MLU 5.3			
			Remain within 10 NM			
			056°			
			2100			
			236°			
			1700			
			≤ 3.00°			
			TCH 50			
			0.5 0.9 3.6 NM			
CATEGORY	A		B		C	D
S-22	560-¾ 482 (500-¾)				560-1	482 (500-1)
CIRCLING	560-1 481 (500-1)		580-1 501 (600-1)		740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

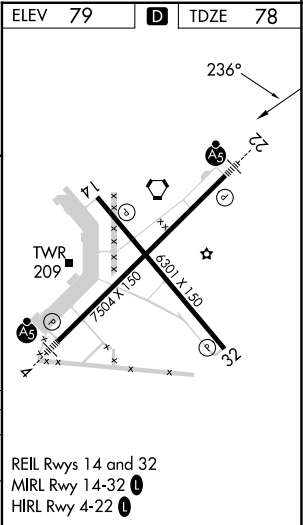

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025