

RNAV (GPS) RWY 10R
MONTEREY RGNL (MRY)

MISSED APPROACH: Climb to 1000 then climbing left turn to 5000 direct SNS VORTAC and hold, continue climb-in-hold to 5000.
*Missed approach requires minimum climb of 387 feet per NM to 1700.

T For uncompensated Baro-VNAV systems, LNAV/VNAV
A NA below 2°C or above 54°C. Circling NA south of Rwy
10R-28L. For inop ALS, increase LPV all Cats visibility
to 1½ SM and LNAV Cat C/D visibility to 2½ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

Procedure NA for arrival on SNS VORTAC
airway radials 167 CW 293.

HOLD
6000
2600

098°
278°
4 NM

(IF/IAF)
ZEBED

1700
098°
(3.7)

(FAF)
MINCK

772±

RW10R

5 NM

3600 to ZEBED
252°
(20)


084°
264°

SALINAS
SNS

MSA RW10R 25 NM
6300

1000
2000
3000
4000
5000
6000
7000
8000
9000
10000

FLY 257
TDZE 198

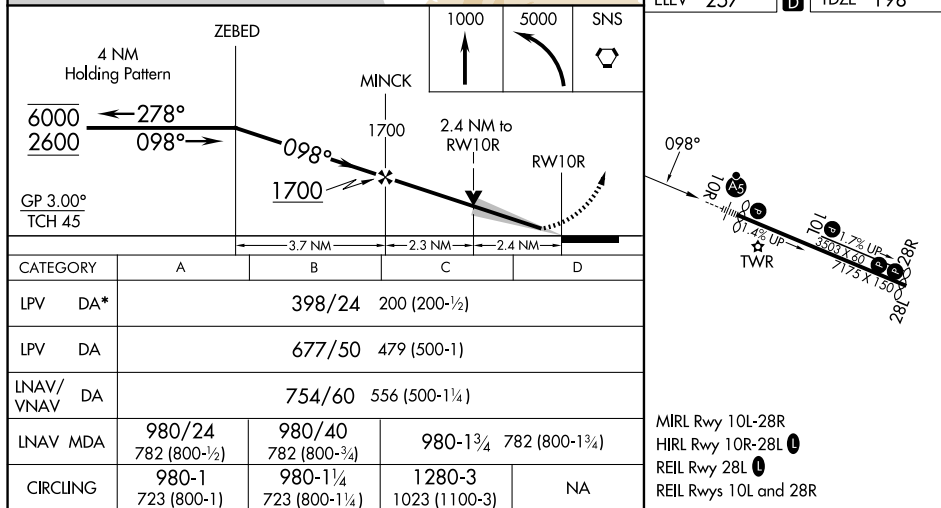

SW-2, 02 OCT 2025 to 30 OCT 2025

SW-2. 02 OCT 2025 to 30 OCT 2025