


APP CRS	Rwy Ldg	7000
278°	TDZE	257
	Apt Elev	257

RNAV (RNP) Z RWY 28L
MONTEREY RGNL (MRY)

For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 48°C (120°F). RF required. GPS required.	MISSED APPROACH: Climb to 5500 on track 278° to URUYU, right turn to CUGVU, and on track 101° to SNS VORTAC and hold.
---	--

ATIS 119.25	NORCAL APP CON 133.0 251.15 (001°-135°) 127.15 307.125 (136°-360°)	MONTEREY TOWER ★ 118.4 (CTAF) 0 257.8	GND CON 120.875 348.6	UNICOM 122.95
----------------	--	--	--------------------------	------------------

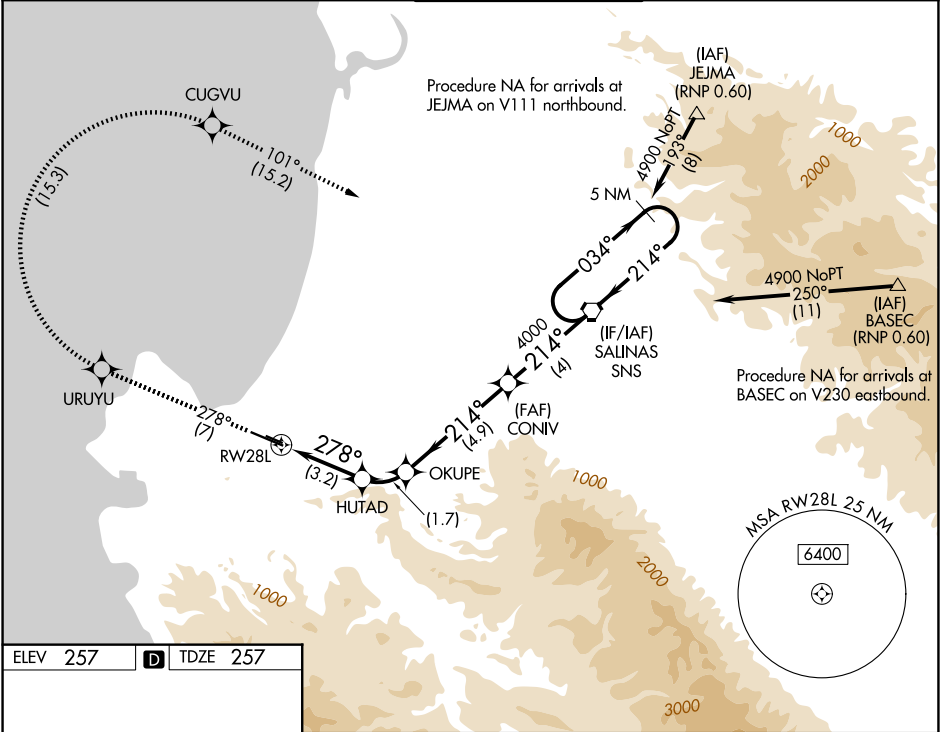

ELEV 257

TDZE 257

MIRL Rwy 10L-28R
HIRL Rwy 10R-28L
REIL Rwy 28L
REIL Rwy 10L and 28R

5500	URUYU	CUGVU	SNS	5 NM Holding Pattern
tr 278°			tr 101°	SNS VORTAC
CONV HUTAD OKUPE 1505 2143 214° 4000 RW28L 278° 3.2 NM 1.7 NM 4.9 NM 4 NM GP 3.60° TCH 45				
CATEGORY	A	B	C	D
RNP 0.10 DA	527/45	270 (300-7/8)		NA
RNP 0.15 DA	767- 1½	510 (600-1½)		NA
RNP 0.20 DA	1236-3	979 (1000-3)		NA
AUTHORIZATION REQUIRED				

SW-2, 02 OCT 2025 to 30 OCT 2025

SW-2, 02 OCT 2025 to 30 OCT 2025