

25219


RNAV (GPS) RWY 18
MYRTLE BEACH INTL (MYR)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV Cat E visibility to 1½ mile and increase LNAV/Cats C, D and E visibility to RVR 6000.
*RVR 1800 authorized with use of FD or AP or HUD to DA.





MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PLANN and hold, continue climb-in-hold to 3000.

ATIS 123.925	MYRTLE BEACH APP CON ★ (171° - 321°) 127.4 257.93 (322° - 170°) 119.2 350.3	MYRTLE BEACH TOWER ★ 128.45 (CTAF) 0 259.3	GND CON 120.3 275.8	CLNC DEL 120.3	UNICOM 122.95
------------------------	---	--	-------------------------------	--------------------------	-------------------------

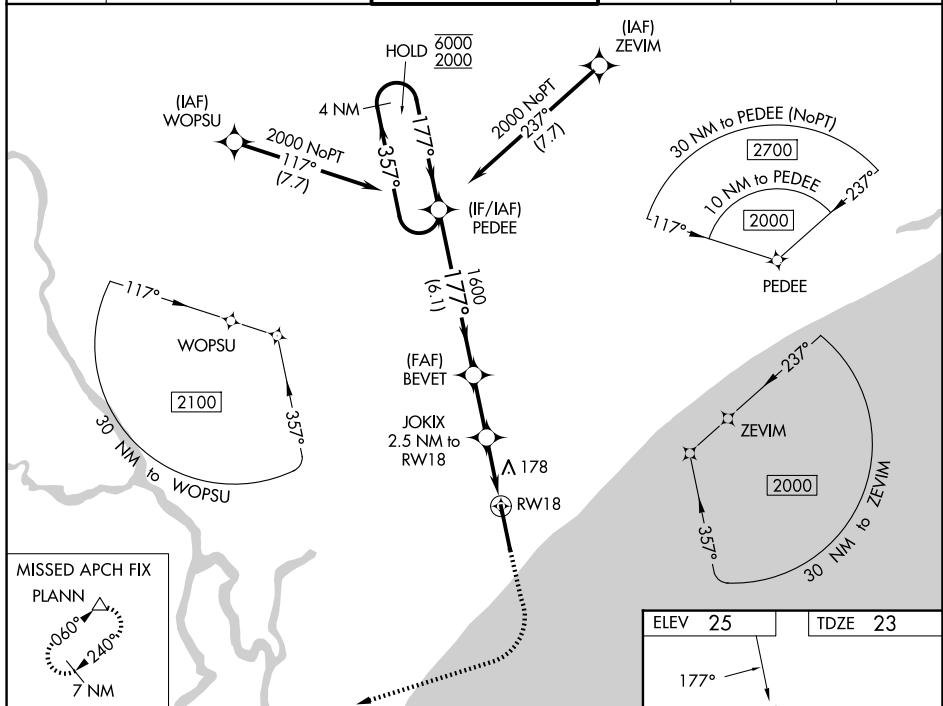

MISSED APCH FIX
PLANN ^

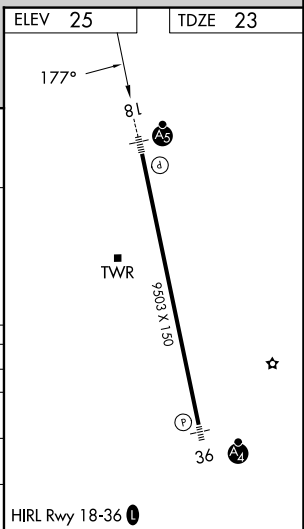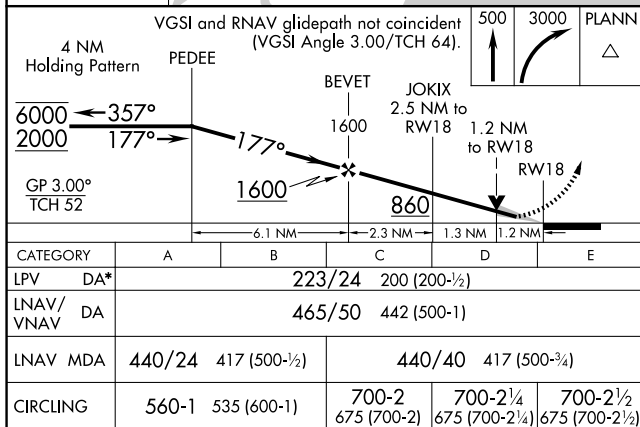

MYRTLE BEACH INTL (MYR)
RNAV (GPS) RWY 18