

WAAS CH 56613 W01A	APP CRS 006°	Rwy Idg 5930 TDZE 17 Apt Elev 36
--	------------------------	---

RNAV (GPS) Y RWY 1L
NAPA COUNTY (APC)

RNP APCH


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or
A above 54°C. Circling Cats A/B/C NA northeast of Rwy 19R and 24.
 Circling Cat D NA east of Rwy 19L-1R. Inop table does not apply to LPV,
 LNAV/VNAV all Cats, and LNAV Cats C/D. Circling Rwy 6 NA at night.

MALS



MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold, continue climb-in-hold to 5000.

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.7	CLNC DEL 127.85	UNICOM 122.95
----------------	-------------------------------	--------------------------------------	------------------	--------------------	------------------

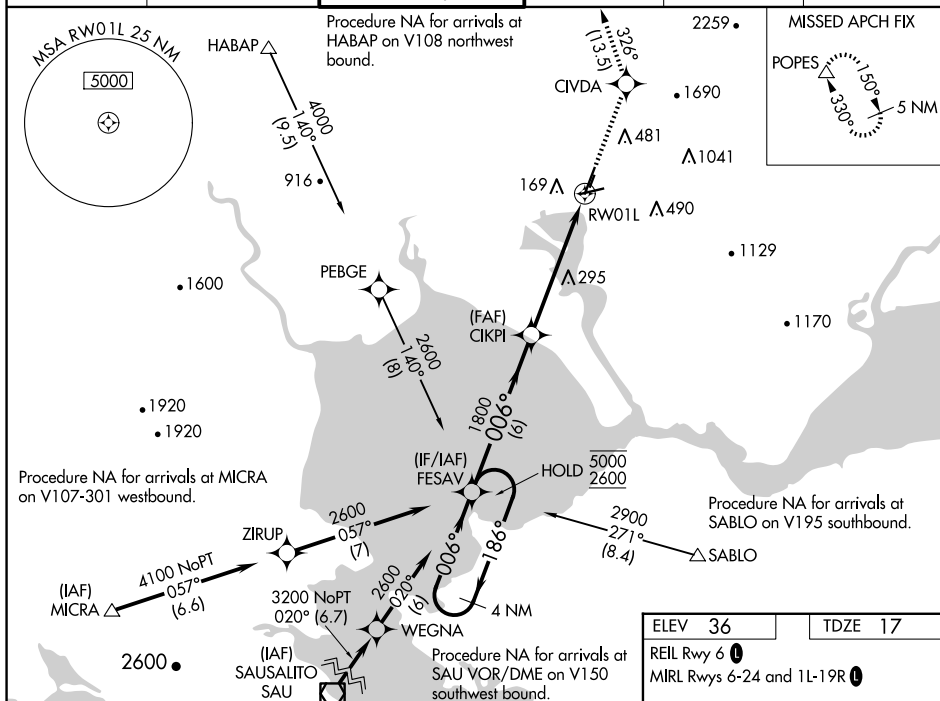

FESAV

4 NM Holding Pattern

5000 ← 186°
2600 → 006°

GP 3.00°
TCH 50

CIKPI 1800

*3.7 NM to RW01L

*LNAV only

RW01L

Distances: 6 NM, 1.8 NM, 3.7 NM

CATEGORY	A	B	C	D
LPV DA	1252-5		1235 (1300-5)	
LNAV/VNAV DA	1051-4		1034 (1100-4)	
LNAV MDA	1260-1 1243 (1300-1)	1260-1¼ 1243 (1300-1¼)	1260-3	1243 (1300-3)
C CIRCLING	1260-1¼ 1224 (1300-1¼)	1260-1½ 1224 (1300-1½)	1280-3 1244 (1300-3)	1300-3 1264 (1300-3)

