

NASHVILLE, TENNESSEE
NASHVILLE INTL (BNA)

EVVAN THREE DEPA
(EVVAN3.EVVAN) 25JUN15

TAKEOFF MINIMUMS:

Rwys 2C, 2L, 2R, 13, 20C, 20L, 20R, 31: Standard with minimum climb of 500' per NM to 1100.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: Radar required.

NOTE: For Turbojet aircraft only.

NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.

NOTE: If unable to accept climb rates, advise ATC on initial contact.

D-ATIS 135.1

CLNC DEL 126.05

CPDLC

GND CON

121.9 348.6


NASHVILLE TOWER

118.6 257.8

NASHVILLE DEP CON
118 4 2607

118.4 360.7

Z

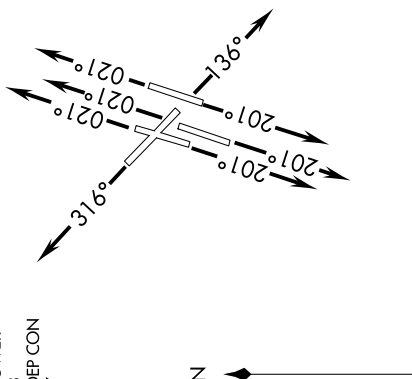

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....

TAKEOFF RWY 13: Climb heading 136° or assigned ATC heading, thence....

TAKEOFF RWYS 20L/C/R: Climb heading 201° or assigned ATC heading, thence....

TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence....

.....expect radar vectors to CHPPY, then on track 115° to EVVAN. Maintain 4000, expect clearance to filed altitude within five (5) minutes after departure.

NOTE: Chart not to scale.

SE-1, 02 OCT 2025 to 30 OCT 2025

