

APP CRS

Rwy Ldg

201°

8000

TDZE

551

Apt Elev

599

RNAV (RNP) Z RWY 20L

NASHVILLE INTL (BNA)


RNP AR APCH - GPS. Authorization required. From RDNEK, TURNT, JOGLO, or SIPPO: RF.

MALSR

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LENON and hold.

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized with Rwy 20R. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4000.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
-----------------	--	--------------------------------	------------------------

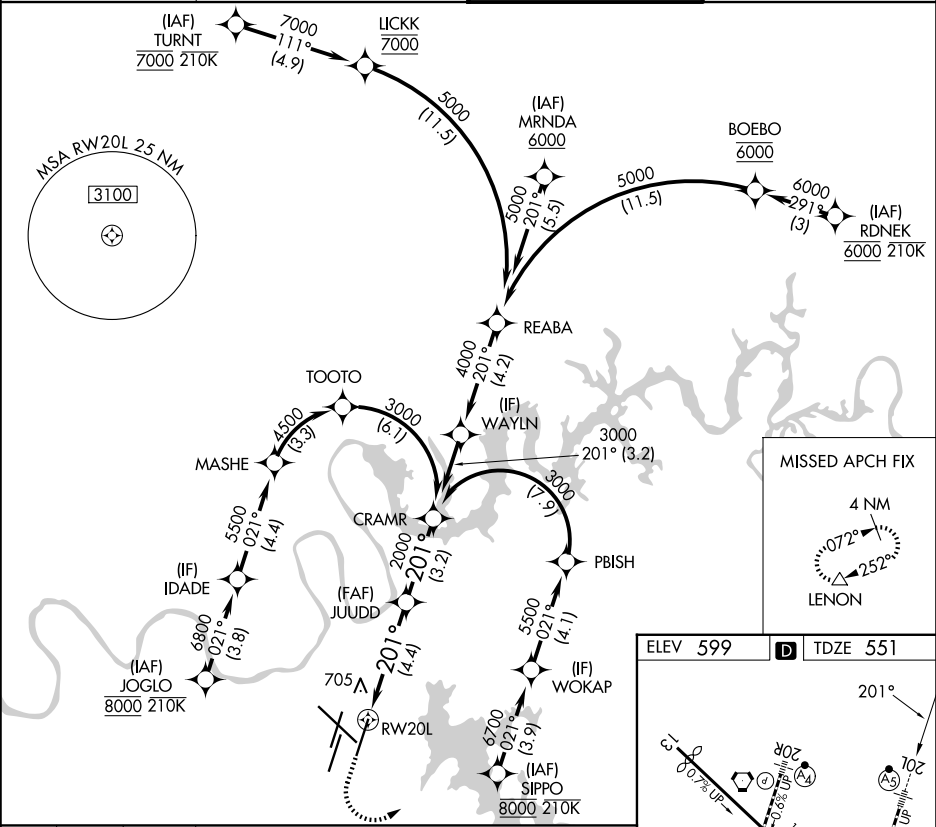

1300

4000

LENON

See planview for multiple IF locations.

CRAMR

JUUDD

2000

3000

201°

2000

GP 3.00°


TCH 55

4.4 NM

3.2 NM

CATEGORY	A	B	C	D
RNP 0.15 DA		801/24	250 (300-½)	
RNP 0.30 DA		975/40	424 (400-¾)	

AUTHORIZATION REQUIRED

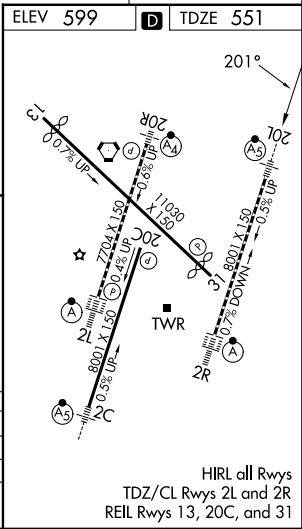

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025