

WAAS CH 93713 W02D	APP CRS 021°	Rwy Ldg TDZE 590 Apt Elev 599
--	------------------------	---

RNAV (GPS) Y RWY 2R

NASHVILLE INTL (BNA)

RNP APCH - GPS.

T


A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS increase LNAV/VNAV visibility all Cnts to RVR 5500.


ALSF-2

MISSED APPROACH: Climb to 1300, then climbing right turn to 4000 direct LENON and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

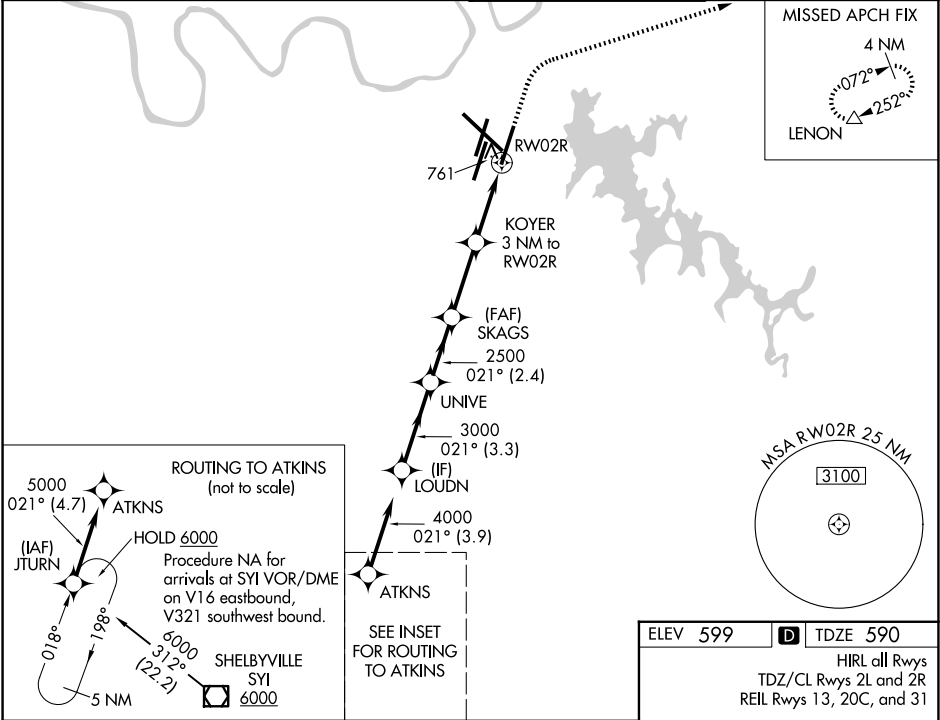

LOUDN		UNIVE		SKAGS		KOYER		LENON	
4000		3000		2500		1600			
GP 3.00°		021°		021°		021°		021°	
TCH 55		3.3 NM		2.4 NM		2.8 NM		1.8 NM	
CATEGORY		A		B		C		D	
LPV DA				790/18		200 (200-½)			
LNAV/VNAV DA				959/35		369 (400-¾)			
LNAV MDA		1020/24		430 (500-½)		1020/40		430 (500-¾)	
CIRCLING		1100-1 501 (600-1)		1120-1 521 (600-1)		1200-1¾ 601 (700-1¾)		1380-2½ 781 (800-2½)	

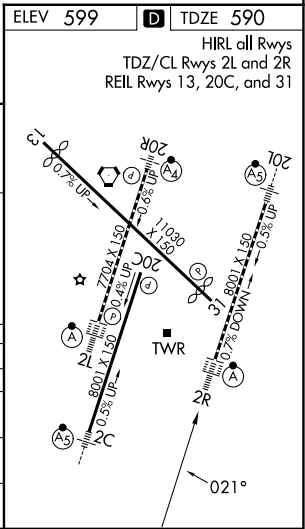

SE-1, 02 OCT 2025 to 30 OCT 2025

SE-1, 02 OCT 2025 to 30 OCT 2025