

LOC/DME I-JNN	APP CRS	Rwy Ldg	22R 9559	22L 8205
110.75	219°	TDZE	10	11
Chan 44 (Y)		Apt Elev	17	17

ILS or LOC RWY 22R
NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS




Aircraft not GPS equipped - RADAR required for procedure entry. DME required.

T Circling NA south of Rwy 11-29. When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For non ALS, increase S-LOC 22R Cat C/D visibility to 1 3/8 SM.

D-ATIS	NEWARK APP CON	NEWARK TOWER
--------	----------------	--------------

D-ATS	NEWARK AFF CON	NEWARK TOWER	GND CON	CLINC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

ALTERNATE MISSED APCH FIX

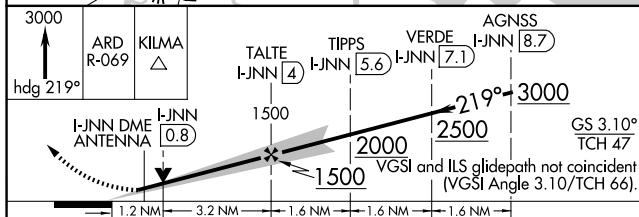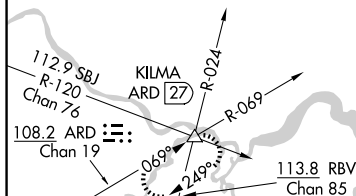

CATEGORY	A	B	C	D
S-ILS 22R	210/18 200 (200-½)			
S-LOC 22R	480/24 470 (500-½)		480/50 470 (500-1)	
SIDESTEP RWY 22L	540/55 529 (600-1)			540-1½ 529 (600-1½)
CIRCLING	660-1 643 (700-1)		900-2¾ 883 (900-2¾)	900-3 883 (900-3)

