

APP CRS 039°	Rwy Ldg 8809 TDZE 11 Apt Elev 17
------------------------	---

RNAV (RNP) Z RWY 4R
NEWARK LIBERTY INTL (EWR)

RNP AR APCH.
RADAR required.

T For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.

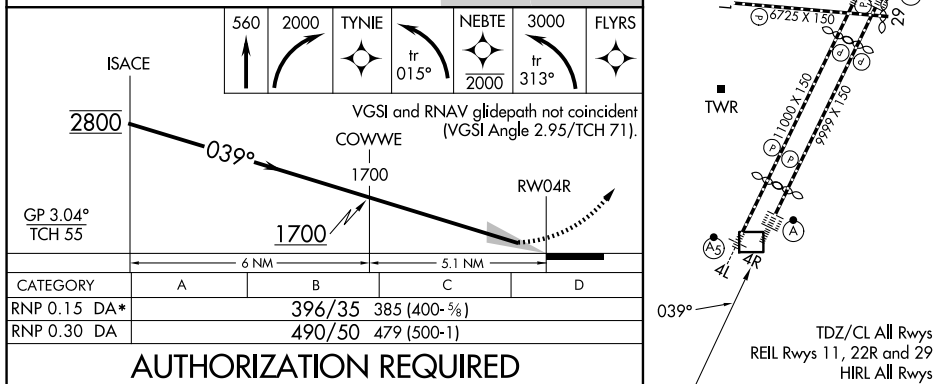
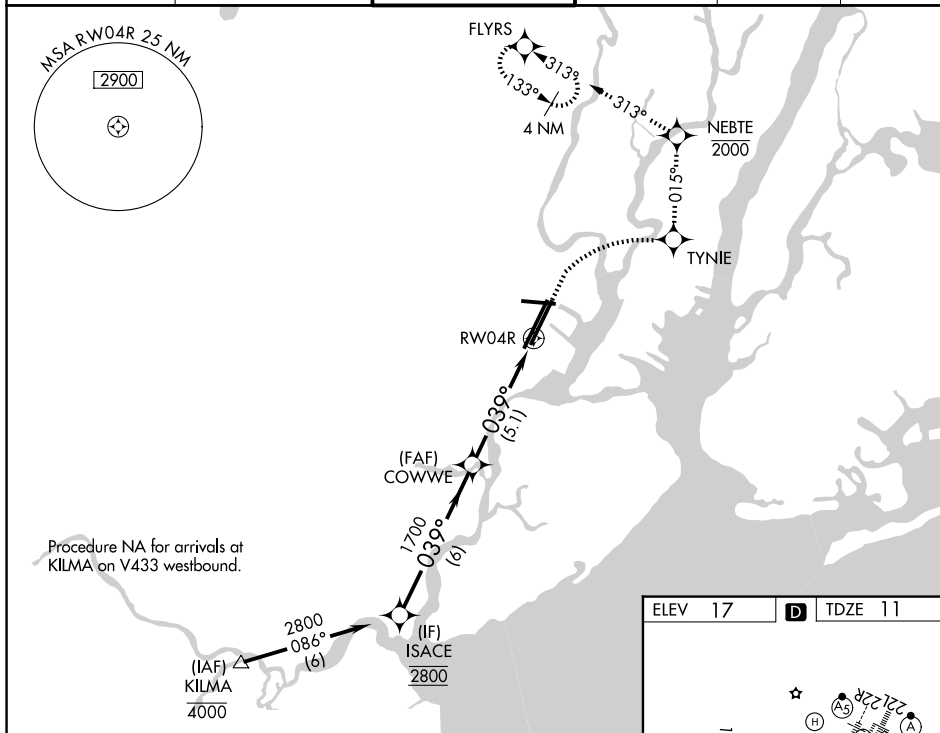
ALSF-2



MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 560 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.

* Missed approach requires minimum climb of 351 feet per NM to 660.

D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

NEWARK, NEW JERSEY
Amdt 1 15JUN23

40°42'N-74°10'W

NEWARK LIBERTY INTL (EWR)

RNAV (RNP) Z RWY 4R

NE-2, 02 OCT 2025 to 30 OCT 2025