
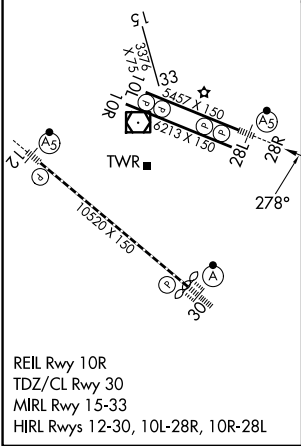


WAAS CH 42535 W28B	APP CRS 278°	Rwy Ldg TDZE Apt Elev	5457 7 9
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) Y RWY 28R

OAKLAND SAN FRANCISCO BAY (OAK)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 3000 direct ZERMO and on track 335° to REBAS and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. For inop ALS, LNAV/VNAV all Cnts increase visibility to RVR 5500. * RVR 1800 authorized with use of FD or AP or HUD to DA.			
D-ATIS 133.775	NORCAL APP CON 125.35 263.15	OAKLAND TOWER 118.3 291.65 (10L/R-28L/R, 15-33) 127.2 256.9 (12-30)	GND CON 121.9 (10L/R-28L/R, 15-33) 121.75 (12-30)

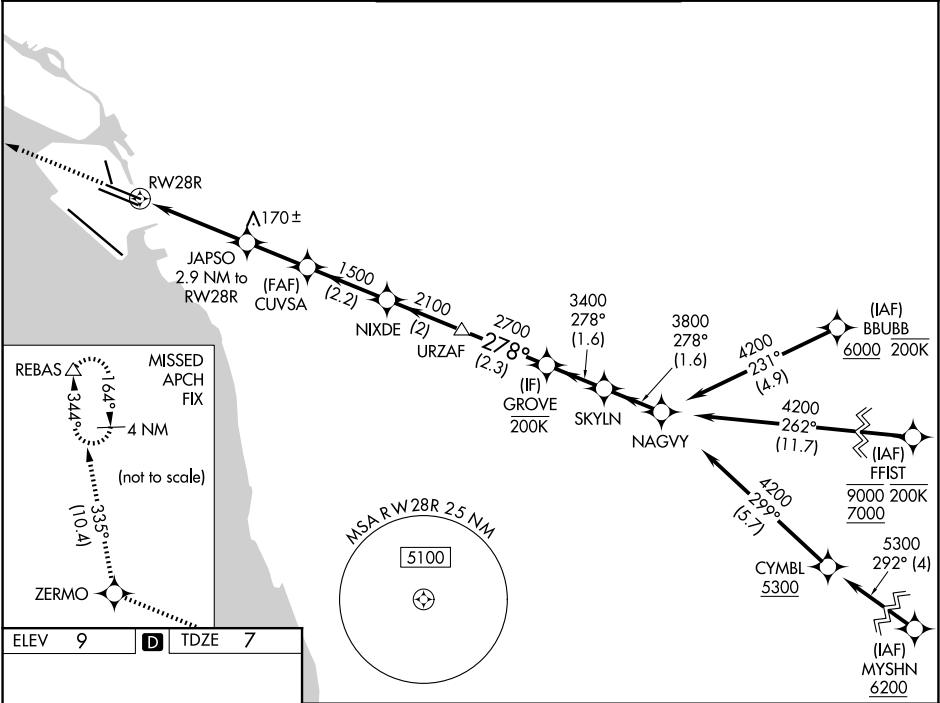

3000	ZERMO	tr 335°	REBAS				
							