

|           |          |                |
|-----------|----------|----------------|
| LOC I-EVG | APCH CRS | Rwy Idg        |
| 111.7     | 126°     | 10,000         |
|           |          | TDZE 1241      |
|           |          | Arpt Elev 1291 |

[USAF]



TINKER AFB (KTIK)

|                                                                                                                                                    |      |                                                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------|------|--------------------------------------------------------------------------------------------------------------------------|
| RADAR required.                                                                                                                                    | SALS | MISSED APPROACH: Climb straight ahead to 2500, then left turn to intercept IRW R-075 to 25 DME (WEVAV) and hold at 3000. |
| ▼ * When ALS inop, increase CAT AB RVR to 50 and vis to 1 mile, CAT C RVR to 60 and vis to 1¼ miles, CAT D vis to 1½ miles, CAT E vis to 1¾ miles. | A2   |                                                                                                                          |


|        |                  |               |             |             |     |
|--------|------------------|---------------|-------------|-------------|-----|
| ATIS ★ | OKE CITY APP CON | TOWER         | GND CON     | CLNC DEL    | ASR |
| 270.1  | 124.2 336.4      | 124.45 251.05 | 121.8 275.8 | 119.7 335.8 |     |

\*\* CAT E Circling not authorized in sector S of Rwy 13-31 and W of Rwy 18-36.


CAUTION: VFR Flyway from FAF to MAP, SFC to 3000 MSL.

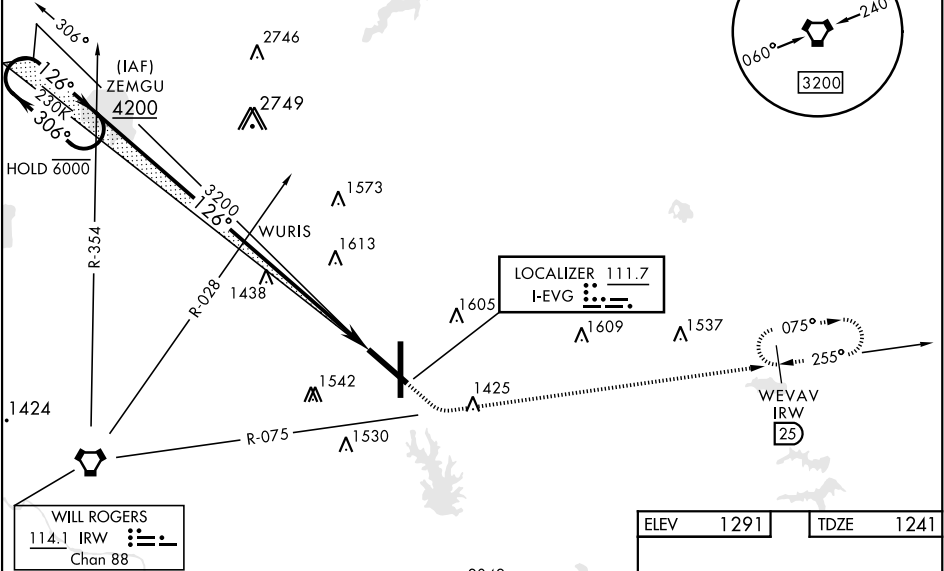

EMERG SAFE ALT 100 NM 4700

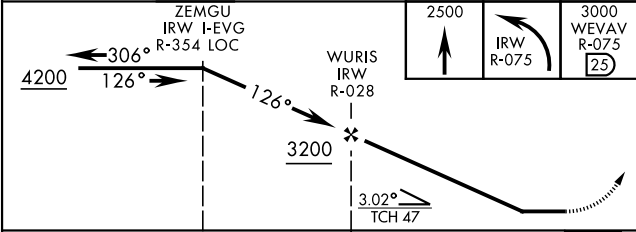

| CATEGORY   | A                   | B | C                    | D                    | E                    |
|------------|---------------------|---|----------------------|----------------------|----------------------|
| S-13 *     | 1740/40 499 (500-¾) |   | 1740/50 499 (500-1)  | 1740/60 499 (500-1¼) | 1740-1½ 499 (500-1½) |
| CIRCLING** | 1880-1 589 (600-1)  |   | 1880-1½ 589 (600-1½) | 1980-2¼ 689 (700-2¼) | 2040-2¾ 749 (800-2¾) |

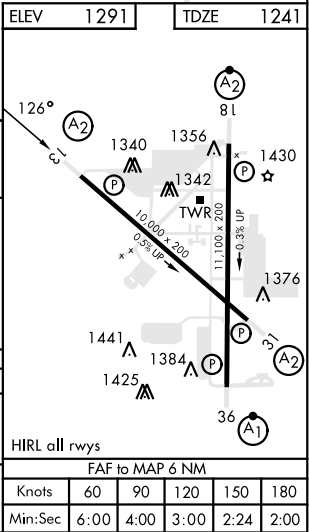

SC-1, 02 OCT 2025 to 30 OCT 2025

SC-1, 02 OCT 2025 to 30 OCT 2025