

PANAMA CITY, FLORIDA

RNAV (GPS) RWY 32R

WAAS CH 52209 W32A	APCH CRS 319°	Rwy Idg 10,008 TDZE 14 Arpt Elev 17
---------------------------------	------------------	--

- (USAF)

TYNDALL AFB (KPAM)

RNP APCH

T * When ALS inop increase RVR to 40, vis to 3/4 mile.
** When ALS inop increase RVR to 55, vis to 1 mile.

MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct SUSIE and hold.

ATIS★
254.4

APP CON/DEP CON
119.775 317.45 BLW 5000'
124 15 338 35 ABV 5000'

TOWER★
133 95 263 15

GND CON
121.9 259.3




CLNC DEL
118.05 348.7

ASR/PAR

*** When ALS inop increase CAT AB RVR to 55,
vis to 1 mile. CAT CDE vis to 1 3/8 miles.


For uncompensated Baro-VNAV systems, Procedure NA below 15°C (59°F) or above 54°C (130°F).

109 • Average Cold Temperature based on standard -30.00°C ISA deviation.

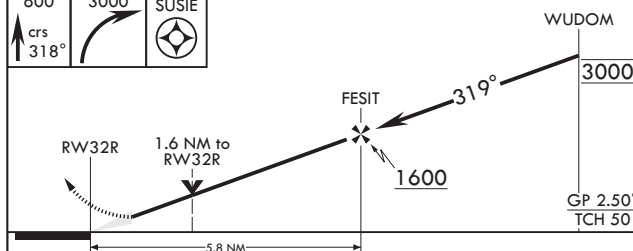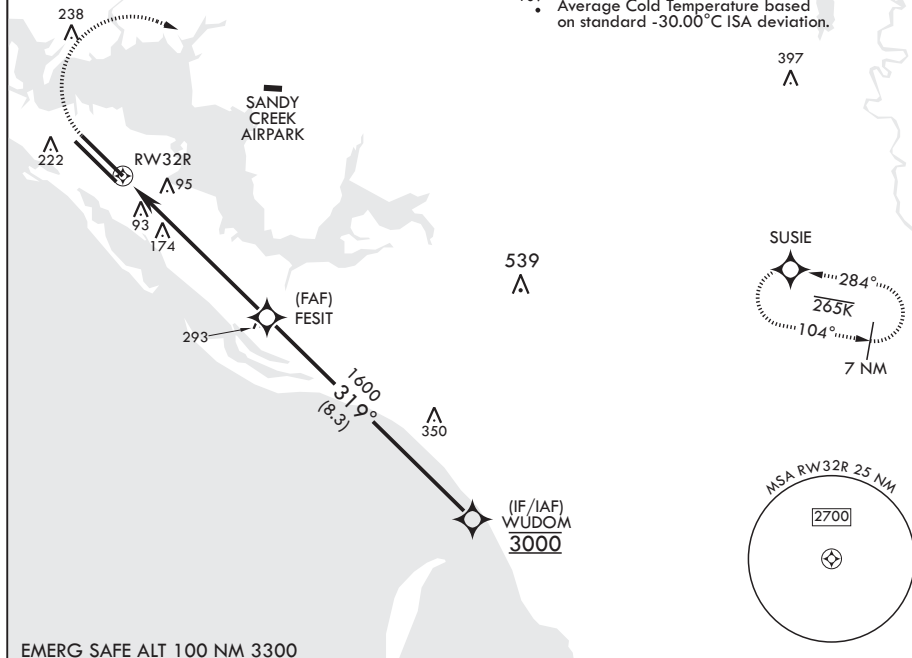

CATEGORY	A	B	C	D	E
LPV DA*	214/24		200	(200-½)	
LNAV/VNAV DA**	362/30		348	(400-5%)	
LNAV MDA***	480/24	466 (500-½)	480/50	466	(500-1)
 CIRCLING	540-1	523 (600-1)	540-1½ 523 (600-1½)	580-2 563 (600-2)	620-2¼ 603 (700-2¼)

ELEV 17	TDZE 14
Rwy 32L Idg 9135'	



HIRL all Rwys
Recommend Rwy 14L-32R for
apch end engagement of A-Gear

PANAMA CITY, FLORIDA

30°04'N - 85°34'W

TYNDALL AFB (KPAM)

Amdt 3 22APR21

RNAV (GPS) RWY 32R

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025