

WAAS CH 40022 W25A	APP CRS 258°	Rwy Idg 10300 TDZE 1134 Apt Elev 1135
--	------------------------	--

RNAV (GPS) Y RWY 25R


PHOENIX SKY HARBOR INTL (PHX)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 26. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.


MISSED APPROACH: Climb to 5000 direct YECXY and via 260° track to BKK VORTAC and hold.

D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)	CLNC DEL 118.1 269.2	CPDLC
--------------------------	--	---	---	--------------------------------	-------

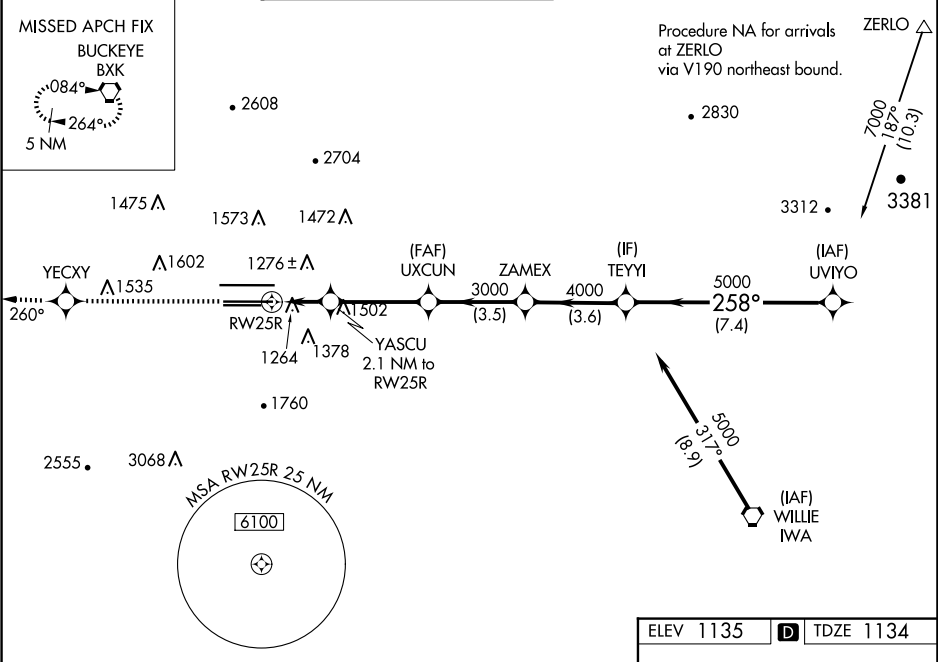

5000 ↑	YECXY ✦	tr 260°	BKK ◻	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70°).				
* LNAV only.				YASCU 2.1 NM to RW25R	UXCUN	ZAMEX	TEYI	UVIYO
CATEGORY		A		B		C		D
LPV DA				1439-1		305 (400-1)		
LNAV/ VNAV DA				1580-1½		446 (500-1½)		
LNAV MDA		1640-1 506 (600-1)				1640-1½ 506 (600-1½)		
CIRCLING		1740-1 605 (700-1)				2040-2¾ 905 (1000-2¾)		2560-3 1425 (1500-3)

ELEV 1135 **D** TDZE 1134



Procedure Turn NA
GP 3.00° TCH 55°

HIRL Rwy 8-26, 7L-25R and 7R-25L
REIL Rwy 26