


WAAS CH 65623 W31A	APP CRS 313°	Rwy Idg TDZE 1720 Apt Elev 1744
--	------------------------	---

RNAV (GPS) RWY 31

PIERRE RGNL (PIR)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.	MALSR 	MISSED APPROACH: Climb to 4000 direct FASIP and hold.
---	-----------	---

ASOS 119.025	MINNEAPOLIS CENTER 125.1 269.1	CTAF 122.70	UNICOM 122.95
------------------------	--	-----------------------	-------------------------

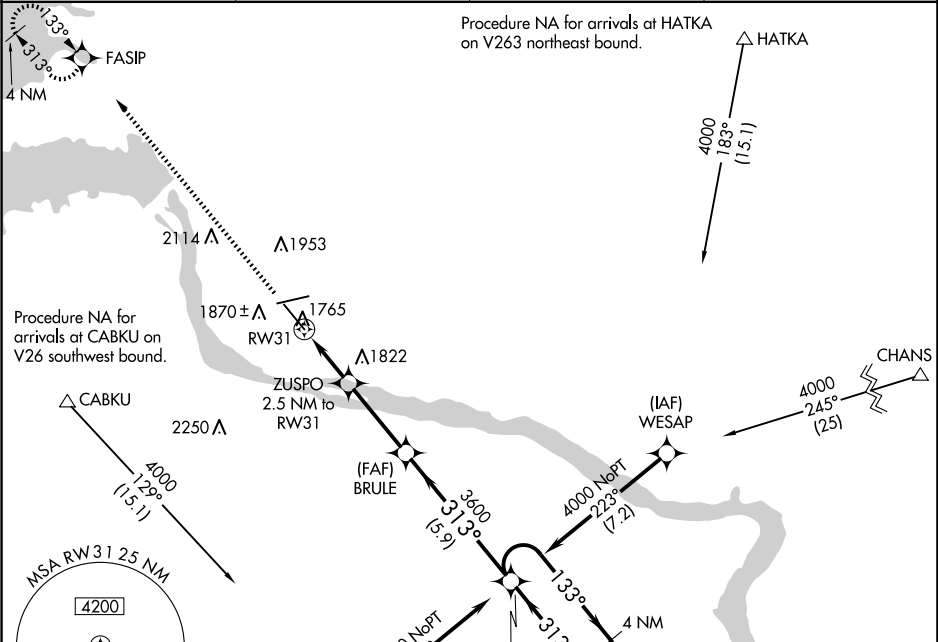

ELEV 1744		D		TDZE 1720	
*LNAV only					
*1 NM to RW31					
*1 NM to RW31					
RW31					
2560*					
1 NM 1.5 NM 3.2 NM 5.9 NM					
CATEGORY	A	B	C	D	
LPV DA	1920-½		200 (200-½)		
LNAV/VNAV DA	1970-½		250 (300-½)		
LNAV MDA	2020-½		300 (300-½)		
CIRCLING	2240-1 496 (500-1)	2300-1 556 (600-1)	2400-1¾ 656 (700-1¾)	2460-2¼ 716 (800-2¼)	