


WAAS CH 45804 W07A	APP CRS 069°	Rwy Idg TDZE 1744 Apt Elev 1744
--	------------------------	---

RNAV (GPS) RWY 7

PIERRE RGNL (PIR)

RNP APCH - GPS.	MISSED APPROACH: Climb to 4000 direct HIWRE and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 45°C. Visibility reduction by helicopters NA.	

ASOS 119.025	MINNEAPOLIS CENTER 125.1 269.1	CTAF 122.70	UNICOM 122.95
------------------------	--	-----------------------	-------------------------

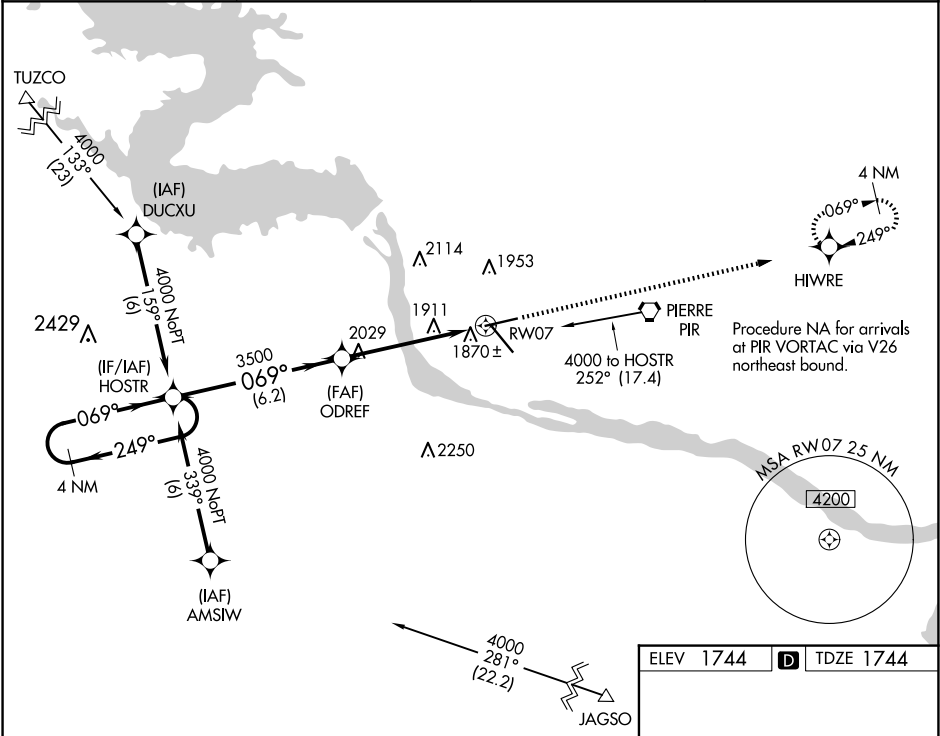

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).		4000	HIWRE
4000		HOSTR		069°	
GP 3.00°		ODREF		1.2 NM to RWY 07	
TCH 47		3500		RWY 07	
		6.2 NM		4.1 NM	
				1.2	
CATEGORY	A	B	C	D	
LPV DA	2057-1		313 (400-1)		
LNAV/VNAV DA	2170-1½		426 (500-1½)		
LNAV MDA	2180-1	436 (500-1)	2180-1¼	2180-1½	
			436 (500-1¼)	436 (500-1½)	
CIRCLING	2240-1	2300-1	2400-1¾	2460-2¼	
	496 (500-1)	556 (600-1)	656 (700-1¾)	716 (800-2¼)	

