



APP CRS	Rwy Idg	11000
103°	TDZE	24
	Apt Elev	31


RNAV (RNP) Z RWY 10R

PORTLAND INTL (PDX)

RNP AR APCH - GPS. Authorization required. From DAYSS, CATUL, or TOWNN: RF.	ALSIF-2 	MISSED APPROACH: Climb to 440 then climbing right turn to 5000 direct MULES and hold, continue climb-in-hold to 5000.
▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.18 all Cats visibility to RVR 4500, increase RNP 0.30 all Cats visibility to RVR 5500.		

D-ATIS 128.35 269.9	PORTLAND APP CON 124.35 299.2	PORTLAND TOWER Rwys 10L-28R 118.7 257.8 Rwys 3-21, 10R-28L 123.775 251.125	GND CON 121.9 348.6	CLNC DEL 120.125 318.1	CPDLC
---------------------------	----------------------------------	--	------------------------	---------------------------	-------

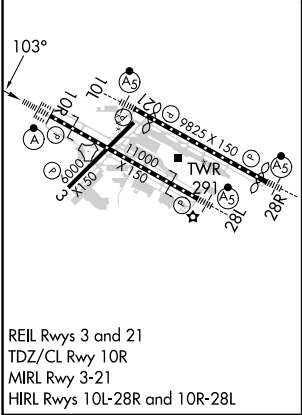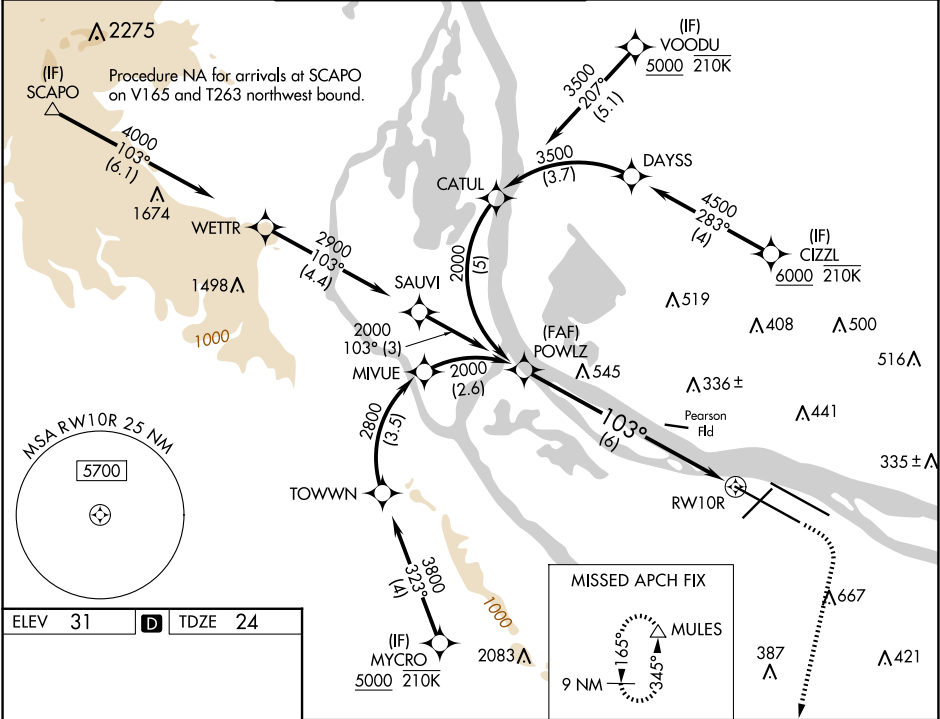

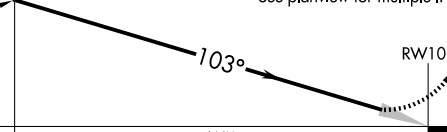VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).					440 ↑	5000 	MULES 
POWLZ 2000					See planview for multiple IF locations.		
<u>2000</u> GP 3.00° TCH 53							
CATEGORY	A	B	C	D			
RNP 0.18 DA	324/24		300 (300-½)				
RNP 0.30 DA	397/35		373 (400-¾)				
AUTHORIZATION REQUIRED							