WAAS CH 93823 W23A	APP CRS 227°	Rwy Idg 8700 / TDZE 50 / Apt Elev 54

RNAV (GPS) Y RWY 23

RHODE ISLAND TF GREEN INTL (PVD)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Inop ALS, increase LNAV Cats C/D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 2500 direct FOSTY and hold.

D-ATIS	PROVIDENCE APP CON *	PROVIDENCE TOWER *	GND CON	CLNC DEL
124.2	123.675 244.875	120.7 (CTAF) L 257.8	121.9 348.6	126.65 348.6

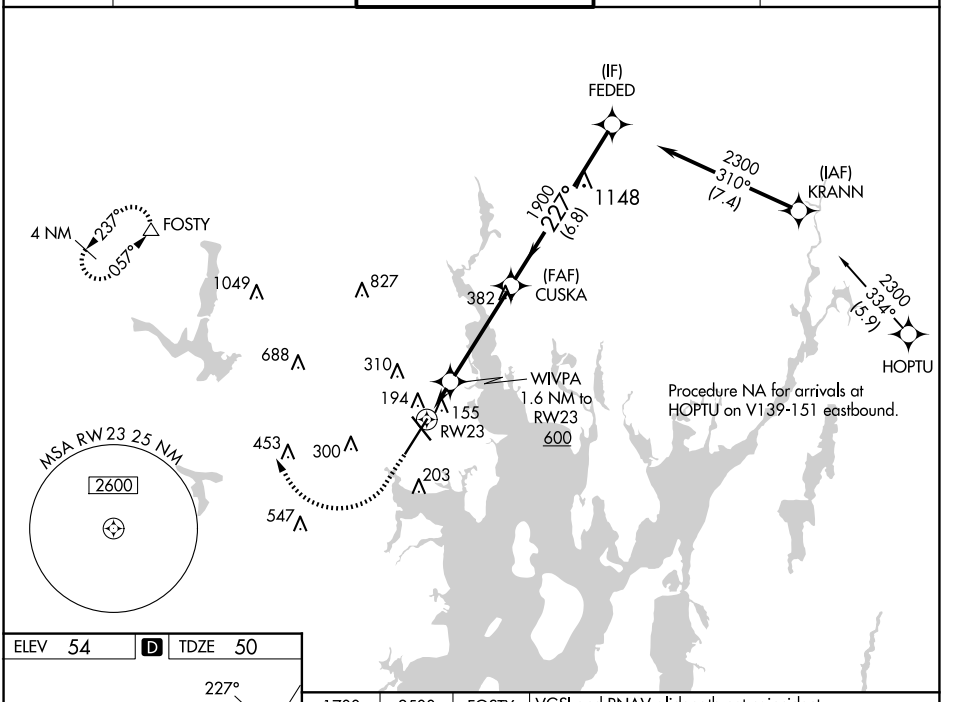

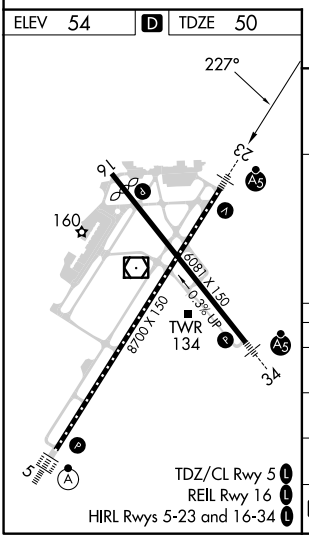

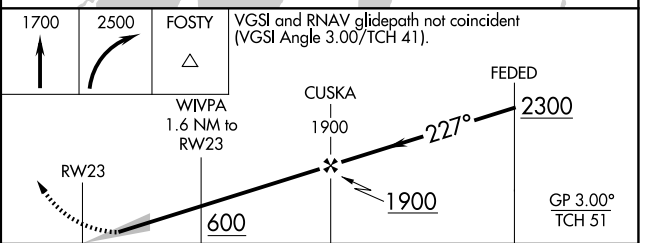

CATEGORY	A	B	C	D
LPV DA *	250/24	200 (200-½)		
LNAV/VNAV DA	355/24	305 (400-½)		
LNAV MDA	460/24	410 (500-½)	460/40	410 (500-¾)
C CIRCLING	560-1 506 (600-1)	640-1 586 (600-1)	640-1½ 586 (600-1½)	860-2½ 806 (900-2½)

NE-1, 02 OCT 2025 to 30 OCT 2025
NE-1, 02 OCT 2025 to 30 OCT 2025