


VORTAC RBL	APP CRS	Rwy Ldg	5431
115.7	149°	TDZE	352
Chan 104		Apt Elev	352

VOR/DME RWY 15
RED BLUFF MUNI (RBL)


⚠ When local altimeter setting not received, use Redding altimeter setting and increase all MDAs and all Cat C/D visibility ¼ SM. VDP NA with Redding altimeter setting.

MISSED APPROACH: Climb to 2000 direct RBL VORTAC and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
-----------------	-------------------------------	---------------------------------

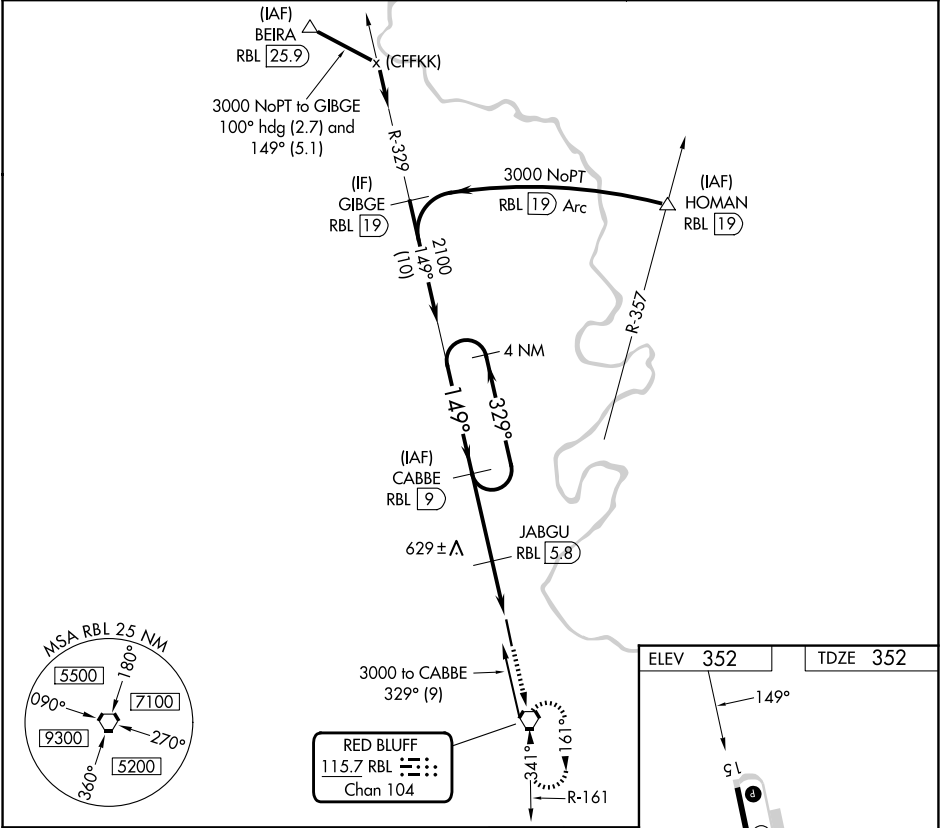

CATEGORY	4 NM Holding Pattern 2100 ← 329° 149° →		CABBE RBL [9] 149° 2.99° TCH 40 3.2 NM		JABGU RBL [5.8] 1080 0.6 NM		2000 ↑ RBL RBL [5.2] RBL [3.6] 1.6 NM	
	A	B	C	D				
	S-15		880-1 528 (600-1)		880-1½ 528 (600-1½)			
	CIRCLING		880-1 528 (600-1)		900-1½ 548 (600-1½)		1060-2¼ 708 (800-2¼)	

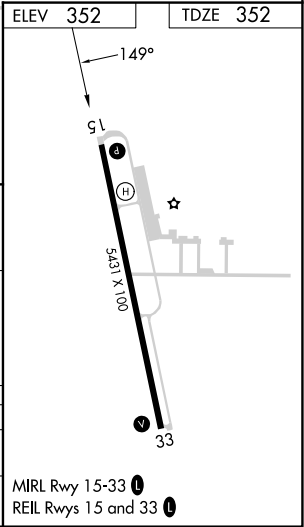

SW-2, 02 OCT 2025 to 30 OCT 2025

SW-2, 02 OCT 2025 to 30 OCT 2025