
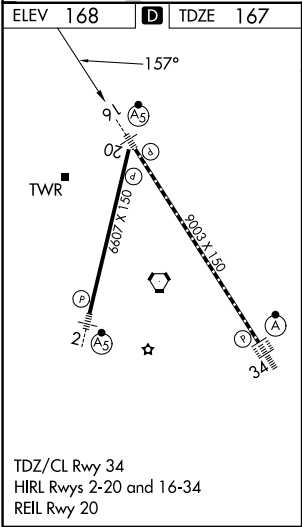


WAAS CH 72720 W16A	APP CRS 157°	Rwy Ldg TDZE 167 Apt Elev 168
--	------------------------	---

RNAV (GPS) Z RWY 16
RICHMOND INTL (RIC)

RNP APCH.		MALSR		MISSED APPROACH: Climb to 2500 direct HAGLI and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). For inop ALS increase LNAV/VNAV all Cats visibility to RVR 5400. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		 		
ATIS 119.15 263.025		POTOMAC APP CON 126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)		RICHMOND TOWER 121.1 257.8
				GND CON 121.9 348.6

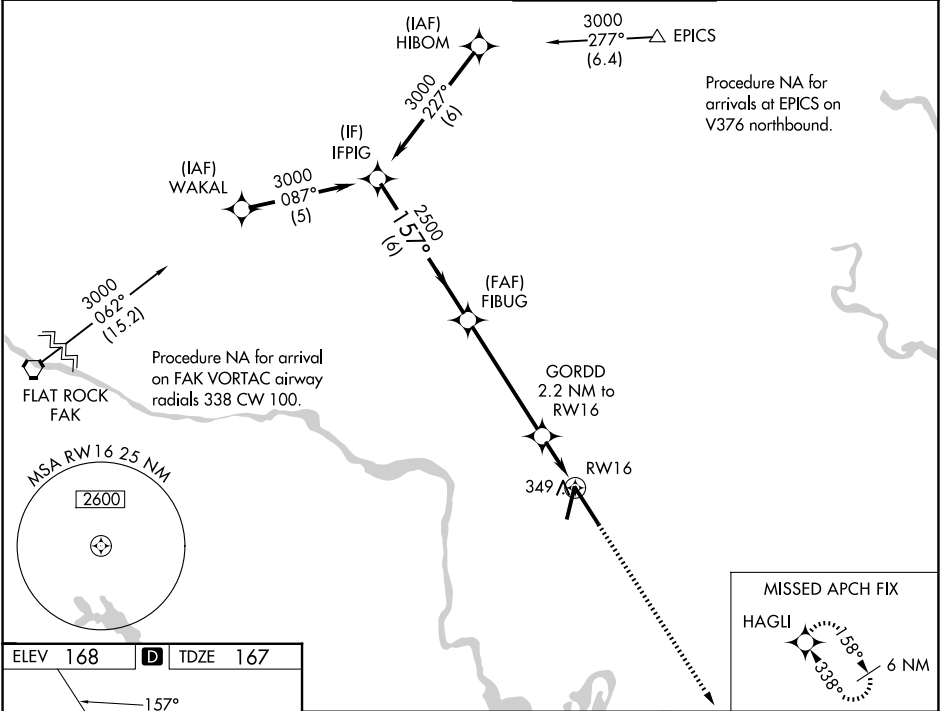

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).			
IFPIG	FIBUG	GORDD	RW16
3000	2500	2.2 NM to RW16	
GP 3.00° TCH 54	2500	920*	
6 NM	5 NM	1 NM	1.2 NM
CATEGORY	A	B	C
LPV DA **	367/24 200 (200-½)		
LNAV/VNAV DA	504/31 337 (400-⅝)		
LNAV MDA	600/24 433 (500-½)	600/40 433 (500-¾)	
CIRCLING	660-1 492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)

NE-3, 02 OCT 2025 to 30 OCT 2025

NE-3, 02 OCT 2025 to 30 OCT 2025