

ROANOKE, VIRGINIA

AL-349 (FAA)

25275

LOC I-ROA 109.7	APP CRS 336°	Rwy Ldg 5810 TDZE 1160 Apt Elev 1175
---------------------------	------------------------	---

ILS or LOC RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

DME required for procedure entry. ADF or RADAR required.




For inop ALS, increase S-ILS 34 # all Cats visibility to 1 $\frac{3}{8}$ SM. Circling NA northwest of Rwy 6-24.
Inop table does not apply to S-ILS 34 all Cats.



MISSED APPROACH: Climb to 2300 then climbing left turn to 4500 direct VIT NDB and hold. Continue climb-in-hold to 4500. # Missed approach requires minimum climb of 425 feet per NM to 3700.

ATIS 132.375	ROANOKE APP CON 133.225 339.8	ROANOKE TOWER 118.3 257.8	GND CON 121.9 257.8
------------------------	---	-------------------------------------	-------------------------------

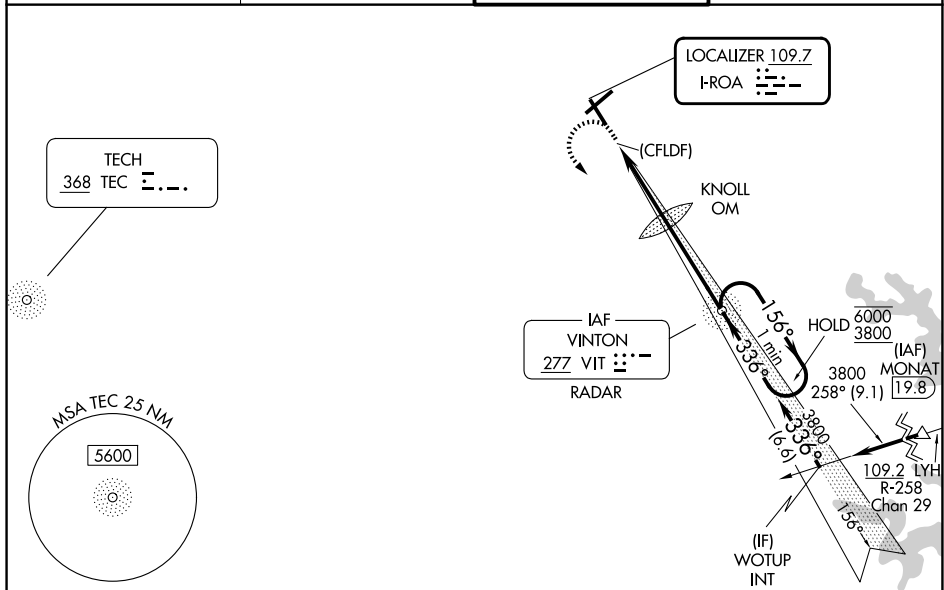

FAF to MAP 7.1 NM					
Knots	60	90	120	150	180
Min:Sec	7:06	4:44	3:33	2:50	2:22

Procedure NA for arrivals at MONAT on V470 northeast bound.

One Minute Holding Pattern

VIT NDB RADAR

KNOLL OM 2511

(CFLDF)

3780

156° → 6000

← 336° 3800

2500

GS 3.00° TCH 56

0.9 3.3 NM 3.8 NM

CATEGORY	A	B	C	D
S-ILS 34 #	1603-7/8		443 (500-7/8)	
S-ILS 34	2040-4		880 (900-4)	
S-LOC 34	2140-3/4 980 (1000-3/4)	2140-1 980 (1000-1)	2140-2 1/2	980 (1000-2 1/2)
CIRCLING	2140-1 1/4 965 (1000-1 1/4)	2140-1 1/2 965 (1000-1 1/2)	2460-3 1285 (1300-3)	2800-3 1625 (1700-3)

ROANOKE, VIRGINIA
Amdt 15 05SEP24

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)
37°20'N-79°59'W ILS or LOC RWY 34

ILS or LOC RWY 34

NE-3, 02 OCT 2025 to 30 OCT 2025